


Heavy IC Forklift Truck

Distinguishing mark	1.1	Manufacturer	HANGCHA GROUP CO.,LTD.								
	1.2	Manufacturer's type designation	CPCD120-XG57	CPCD120-XW25	CPCD120-XW79	CPCD140-XG57	CPCD140-XW25	CPCD140-XW79	CPCD160-XG57	CPCD160-XW25	CPCD160-XW79
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker	Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated
	1.5	Rated capacity/rated load	Q (kg)	12000	12000	12000	14000	14000	16000	16000	16000
	1.6	Load centre distance	c (mm)	600	600	600	600	600	600	600	600
Weight	1.8	Load distance, centre of drive axle to fork	x (mm)	760	760	760	785	785	785	805.5	805.5
	1.9	Wheelbase	y (mm)	3000	3000	3100	3100	3100	3100	3100	3100
	2.1	Service Weight	kg	15600	15600	15600	17600	17600	17600	19200	19200
Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic
	3.2	Tyre size, front	10.00-20-14PR	10.00-20-14PR	10.00-20-14PR	11.00-20-18PR	11.00-20-18PR	11.00-20-18PR	12.00-20-20PR	12.00-20-20PR	12.00-20-20PR
	3.3	Tyre size, rear	10.00-20-14PR	10.00-20-14PR	10.00-20-14PR	11.00-20-18PR	11.00-20-18PR	11.00-20-18PR	12.00-20-20PR	12.00-20-20PR	12.00-20-20PR
	3.6	Tread, front	b10 (mm)	1780	1780	1780	1780	1780	1780	1780	1780
Dimensions	3.7	Tread, rear	b11 (mm)	1920	1920	1920	1890	1890	1890	1890	1890
	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12
	4.2	Height, mast lowered	h1 (mm)	3180	3180	3180	3270	3270	3290	3290	3290
	4.4	Lift	h3 (mm)	3000	3000	3000	3000	3000	3000	3000	3000
	4.7	Height of overhead guard	hc (mm)	2930	2930	2930	3060	3060	3080	3080	3080
	4.19	Overall length	l1 (mm)	6020	6020	6090	6230	6230	6340	6340	6340
	4.20	Length to face of forks	l2 (mm)	4500	4500	4570	4710	4710	4820	4820	4820
	4.21	Overall width	b1 (mm)	2420	2420	2480	2480	2480	2480	2480	2480
	4.22	Fork dimensions ISO 2331	s/e/l (mm)	80x200x1520	80x200x1520	80x200x1520	85x200x1520	85x200x1520	90x200x1520	90x200x1520	90x200x1520
	4.25	Distance between fork-arms	b5 (mm)	520/2200	520/2200	520/2200	520/2200	520/2200	520/2200	520/2200	520/2200
	4.31	Ground clearance, laden, below mast	m1 (mm)	250	250	250	250	250	270	270	270
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	315	315	330	330	330	350	350	350
Performance data	4.35	Turning radius	Wa (mm)	4150	4150	4250	4350	4350	4450	4450	4450
	5.1	Travel speed, laden/unladen	km/h	23/27	23/27	22/26	24/28	24/28	23/27	25/29	24/28
	5.2	Lift speed, laden/unladen	m/s	0.330/0.360	0.330/0.360	0.315/0.345	0.345/0.385	0.345/0.385	0.330/0.365	0.335/0.365	0.320/0.345
	5.5	Drawbar pull, laden/unladen	N	100000/-	100000/-	100000/-	115000/-	115000/-	125000/-	125000/-	125000/-
Combustion-engine	5.7	Gradeability, laden/unladen	%	20/-	20/-	20/-	20/-	20/-	20/-	20/-	20/-
	5.10	Service brake		Pneumatic Drum			Pneumatic Drum			Pneumatic Drum	
		Parking brake		Spring energy storage			Spring energy storage			Spring energy storage	
	7.1	Engine manufacturer/type		CHINA/ YC6J160-T300	CUMMINS/ QSB6.7-CL160	CUMMINS/ QSB6.7	CHINA/ YC6J160-T300	CUMMINS/ QSB6.7-CL160	CUMMINS/ QSB6.7	CHINA/ YC6J160-T300	CUMMINS/ QSB6.7-CL160
Addition data	7.2	Emission STD		Stage3A/Tier3			Stage4/Tier4f			Stage4/Tier4f	
	7.3	Engine power according to DIN ISO 1585	kw	118	119	118	118	118	118	119	118
	7.4	Rated speed	min	2200	2300	2100	2200	2300	2100	2200	2100
	7.4	Number of cylinders/displacement	(-)/(cm³)	6/6500	6/6700	6/6700	6/6500	6/6700	6/6700	6/6500	6/6700
	7.10	Battery voltage/nominal capacity	V/Ah	2x12/120	2x12/120	2x12/120	2x12/120	2x12/120	2x12/120	2x12/120	2x12/120
		Rated torque	N.m/r/min	650/1400-1700	731/1500	841/1500	650/1400-1700	731/1500	841/1500	650/1400-1700	731/1500
		Bore x stroke	mm	105x125	107x124	107x124	105x125	107x124	107x124	105x125	107x124
		Stage FwD/RV5		2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1
	10.1	Operating pressure for attachments	bar	200	200	200	200	200	200	200	200

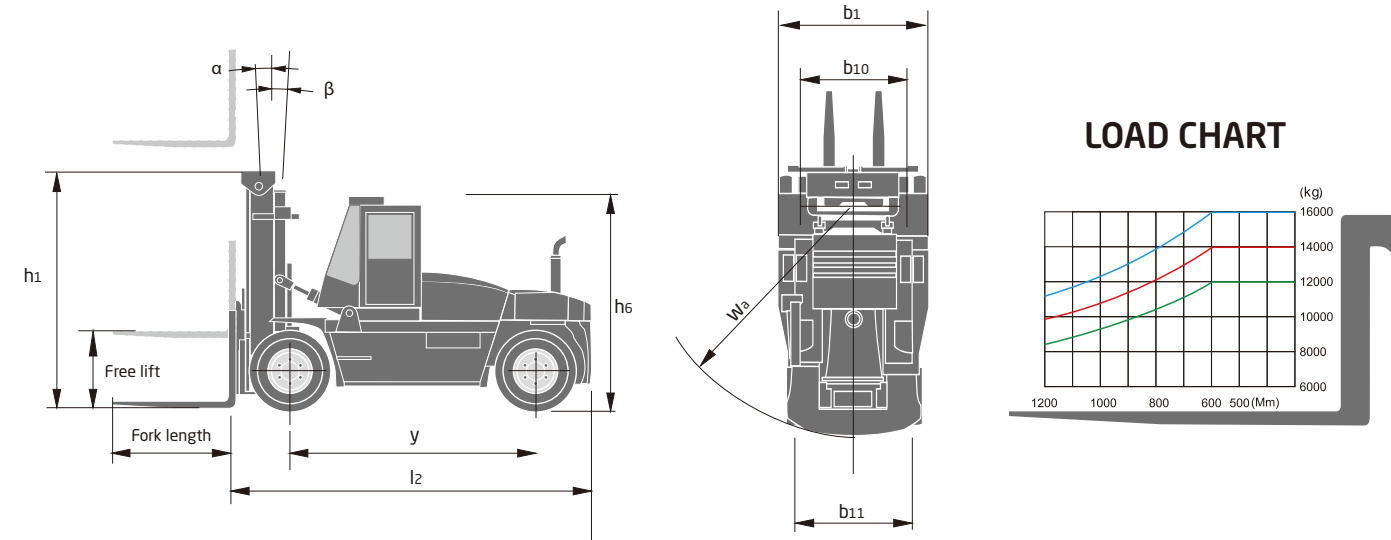

12.0-16.0t Forklift Mast Specification

Type	Model	Mast fork height	Overall height		Tilt range		Capacity
			Lowered	Extended	FWD	RWD	load capacity at 600mm
				Without backrest			Double tire
GX120MX		mm	mm	mm	(°)	(°)	kg
		3000	3180	4695	6	12	12000
		3300	3330	4995	6	12	12000
		3600	3480	5295	6	12	12000
		4000	3680	5695	6	12	12000
		4300	3880	6030	6	6	12000
		4500	3980	6230	6	6	12000
		4800	4130	6530	6	6	12000
		5000	4230	6730	6	6	12000
		5500	4530	7280	3	6	10000
		6000	4780	7780	3	6	9000
		3000	3270	4770	6	12	14000
GX140MX		3300	3420	5070	6	12	14000
		3600	3570	5370	6	12	14000
		4000	3770	5770	6	12	14000
		4300	3970	6120	6	12	14000
		4500	4070	6320	6	12	14000
		4800	4220	6620	6	6	14000
		5000	4320	6820	6	6	14000
		5500	4620	7370	3	6	12000
		6000	4870	7870	3	6	11000
		3000	3290	4790	6	12	16000
		3300	3440	5090	6	12	16000
		3600	3590	5390	6	12	16000
GX160MX		4000	3790	5790	6	12	16000
		4300	3990	6140	6	12	16000
		4500	4090	6340	6	12	16000
		4800	4240	6640	6	6	16000
		5000	4340	6840	6	6	16000
		5500	4640	7390	3	6	14000
		6000	4890	7890	3	6	12500



Hangcha Europe GmbH

Mariechen-Graulich-Straße 12a,
65439 Flörsheim am Main,
Germany

Administration
Tel: 0049-61453769188
E-mail: admin@hangchaeurope.com

Sales Management
Thomas Dittrich
Mob: 0049-16096548808
E-mail: thomas.dittrich@hangchaeurope.com

Technical Support
Thomas Pannke
Mob: 0049-01759284213
E-mail: thomas.pannke@hangchaeurope.com

www.hangchaeurope.com



HANGCHA Group Co., LTD behält sich das Recht vor, Änderungen bezgl. Farbe, Spezifikationen, Ausstattung und sonstige Details, dierer Broschüre ohne Vorankündigung vorzunehmen. Fahrzeugfarben können von den Farben in dieser Brochure abweichen.

2025 VERSION 1 COPYRIGHT 2025/07



Heavy IC Forklift Truck

with capacities of 12,000 to 16,000kg

The World of Hangcha



Heavy IC Forklift Truck

Environment/
Efficiency/
Economy



Drive Axle

/ Made in China, HANGCHA-customized, heavy-duty master reducer, pneumatic brake system.

Gear-box

/ Imported gear-box, multi-stage torque converter, big converter ratio, wide range of auto-adjust speed; stable and smooth shift, 2 stage forward and 1 stage backward, easy operation and maintenance.

Steering System

/ HANGCHA-made crosswise steering axle; The steering with load sensor and adjustable steering device make the operation easily.

Hydraulic System

/ Multi-hydraulic valve make it easy to operate. Load sensor hydraulic system, dual pumps supply, dynamic load sensor priority valve, reduce power consumption, lower the hydraulic oil temperature.

Chassis

/ The combined chassis structure provide the high intensity and low weight feature, increase the cooling area of the oil tank greatly.

Power System

/ The customer can choose Cummins turbo 6 cylinder engine or Yuchai engine which according with the GB3 Emission Regulation, high performance, low oil consumption, low speed with high torque, great capacity cooler.

Brake System

/ Adopt auto parts, air braking system improves the comfort also reduce the pollution cause by oil leakage.

Lifting Assembly

/ Wide view mast provide great operator visibility; Dual limited speed valves increase the safety; Distance between forks can be adjusted manually is the standard feature, customer can choose fork positioner or sideshifter.

Overhead Guard

/ Full suspension overhead guard connected the chassis with 4 pivots using the rubber;Tilted structure is easy for maintenance; Smaller column and steering wheel increase the operator space.

Electrical System

/ The instrument show all information about the forklift; it will sound alert when low brake pressure or non-lease parking brake.

Standard Specification

- / Hour meter
- / Overhead guard
- / Full hydraulic power steering
- / Wide view duplex mast
- / Standard forks
- / Pneumatic tyre
- / Toolbox
- / Cabin with heater and air conditioner (Only for W79)

Options

- / 2.5-6.0m duplex mast
- / Special carriage and backrest
- / Solid tyre
- / Heater and air conditioner
- / Other dimension forks
- / Other attachment
- / Fire extinguisher
- / Suspension seat
- / Dual air cleaner or special air cleaner
- / Rear working light
- / Customer painting
- / Cab
- / Hydraulic positioner

