

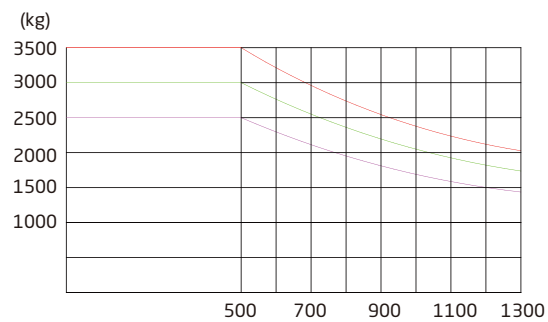


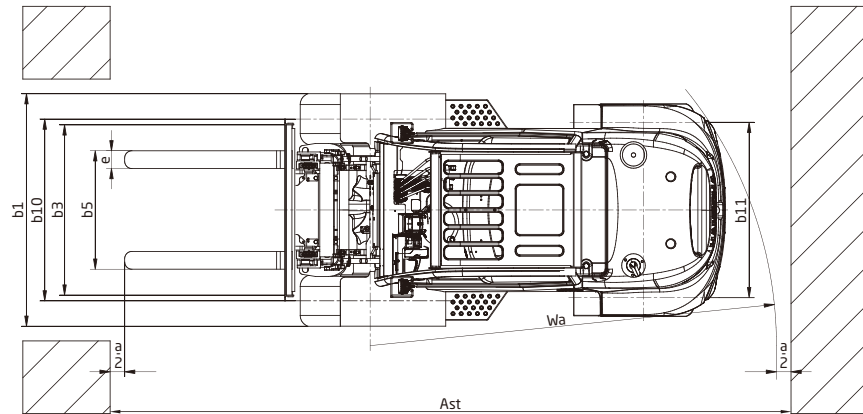

Optional Engine

Engine	Engine manufacturer/type		YANMAR/4TNE98	XINCHAI/4D32XG30-011	XINCHAI/4D32X41-002	KUBOTA/V2607-CR-TE58
	Manufacturer's type designation		W33	G72	G92	W98
	Drive		Diesel	Diesel	Diesel	Diesel
	Emission STD		StageIIIA	/	/	StageV
	Engine power	kw/r/min	42.1/2300	45.8/2500	36.8/2500	47.3/2400
	Rated torque	N.m/r/min	206/1700	200/1500-1800	200/1400-1600	221.7/1500
Number of cylinders/displacement		ml	4/3319	4/3170	4/3168	4/2615
Rated capacity/rated load		Q (kg)	2500-3500	2500-3500	2500-3500	2500-3500

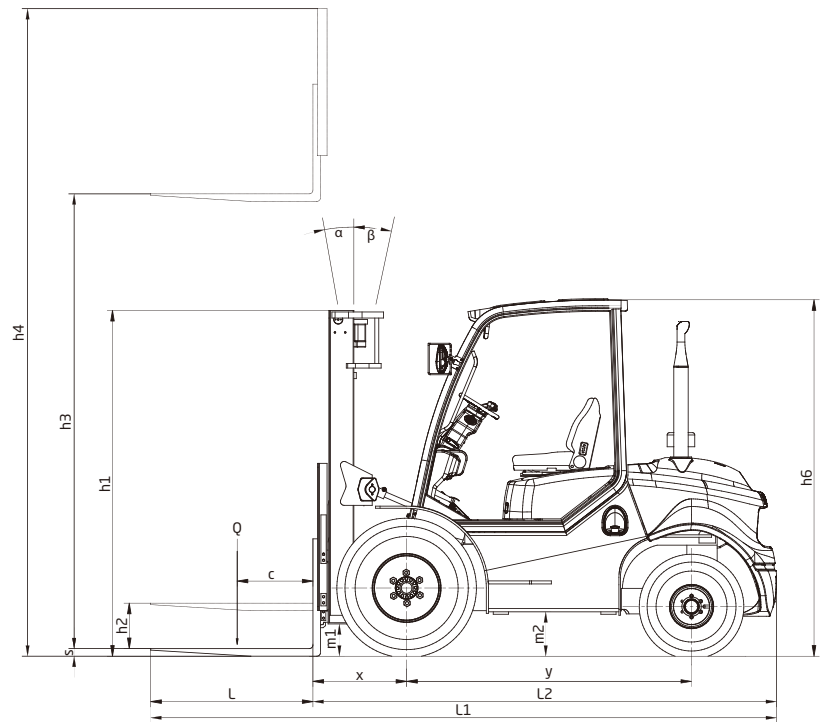

Hangcha Europe GmbH
Mariechen-Graulich-Straße 12a
65439 Flörsheim am Main
Deutschland

Tel.: +49 6145 3769166
E-Mail: admin@hangchaeurope.com

www.hangchaeurope.com



Hangcha
Official Website



Follow us on
LinkedIn



Follow us on
Facebook



Follow us on
YouTube



ISO 45001:2018



ISO 14001:2015



ISO 9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

2026 VERSION 1.1/COPYRIGHT 2026/07



Two-Wheel Drive Rough Terrain Forklift

with capacities of 2,500 to 3,500kg



HANGCHA


The World of Hangcha

HANGCHA be with you at every stage
Efficient, reliable solutions for your demands

STAGE V & TIER 4F

With Hangcha you can meet all Stage V/Tier 4f emissions standards which provides customer demands for value, innovation and performance. The technologies include common rail fuel systems, diesel oxidation catalysts (DOC) and diesel particulate filters (DPF). Designed and optimised to every engine model, our forklift truck maximises efficiency and reliability.

**Powerful/
Efficient/
Reliable**

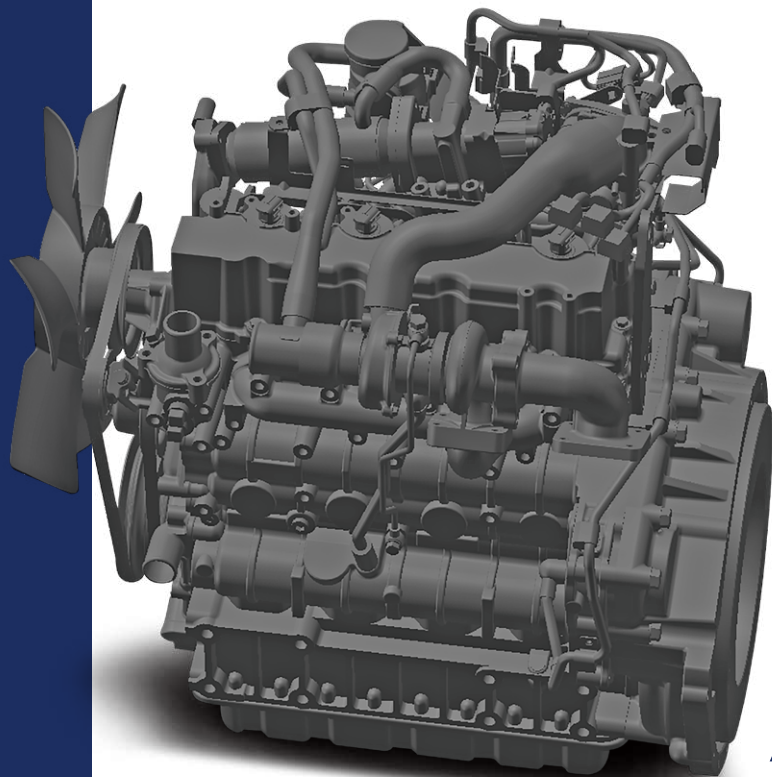

KUBOTA



Interactive instrument: The instrument adopts 4.0-inch color LCD display with four interactive buttons, and has one CAN bus communication function. The communication protocol is compatible with SAE J1939 standards.



HANGCHA Forklift with StageV and T4F

No.	Capacity	Series	Manufacturer	Engine	Drive power	Model	Emission Std.	Transmission	Power (kw/rpm)
1	2.5-3.5t	RT	KUBOTA	V2607-CR-TE5B	Diesel	CPCD25/30/35-XW98E-RT2	StageV / Tier4 final	CHINA	47.3/2400

Note: RT means 2WD/4WD Rough Terrain forklift

Two-Wheel Drive Rough Terrain Forklift

Hangcha 2.5~3.5t rough terrain forklifts is a tough, compact forklift with a two-wheel drive system. It is based on XF series IC forklift truck. It is world renowned for superior performance, economy and longevity.

Simple/Solid/
Smart



Reliability


- / Suspension hydraulic transmission with two forward gears and one reverse, providing higher speed and greater gradeability; Drive axle is equipped with wide-base and deep tread tires, enhanced brakes, bearings, differential with automatic locking function, as well as enhanced steering axle assembly providing ultimate traction during inclement weather conditions and rough operating surfaces.
- / Dual air filter\extra capacity combined radiator with serpentine wave and optimized heat dissipation channel enhance the heat dissipation capability to keep engine reliability even in heavy-duty applications. Oscillating steer axle allows either wheel to step over obstacles keeping the truck and load level, high ground clearance offers greater maneuverability and keeps the truck moving in the roughest of applications.
- / The new vehicle controller integrates all electrical components, features excellent durability for temperature\water and vibration, and the oil filter/return oil filter are all work for the most demanding operation.

Environmental friendliness

- / Each model employs a specially developed engine for the optimum balance of power and superior environmental performance, the truck is in compliance with EU III and EAP III control regulation.
- / The environment friendly materials, such as non-asbestos brake shoe and new type sealing gasket, are adopted entirely to meet environmental safety. And the noise level is reduced too.



The new efficiency lighting system employs LED illuminant and new type reflector to reduce energy consumption, improve significantly illumination performance and prolong work time

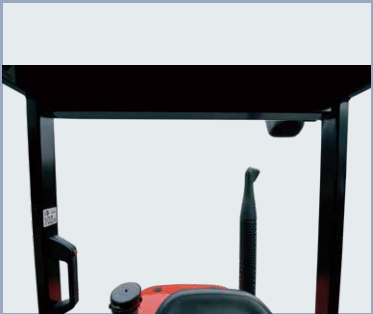

Optimized designing structure to offer a good visibility and easy entrance of the pallet



The new designed steering wheel\ new brake system and the easy-to-operate levers provide total handling operation



The easy-to-open hook provides quick access to the engine compartment



The large, spacious cab of our new boasts left and right grab handles with wide-opening doors for easy access

Productivity

/ The new Dynamic load sensing hydraulic steering system contributes to reduce loss of hydraulic and improve energy efficiency.

Easy maintenance

/ The cover on the Panel can be lifted up simply to check the brake fluid.
/ The two-piece design makes the floorboard easy to lift and remove for access to the power train.
/ The fasteners of the radiator cover can be turned easily by hand to enable quick inspections or servicing.

Comfortable operation

/ In developing the rough terrain forklift, comfort and easy operation is always considered, for example, improved vibrating levels, compound engine damper and full floating seat and cabin are all applied. Comfortable also contribute to increased productivity and reduced the noise.
/ The extra foot space is provided to reduce operator fatigue significantly, non-slip step makes getting in and out easy and safe.
/ The new design mast provides broad forward visibility due to the longer distance between inside mast.

Options

/ Cabin
/ Heater
/ Front window
/ L/R mirror
/ Extinguisher
/ Customer painting
/ OPS system
/ Sparkle arrester
/ Purified exhaust system
/ Auxiliary hydraulic valve
/ Front working light
/ Triplex wide view free-lift mast
/ Special forks
/ Weigher system
/ Attachments

Two-Wheel Drive Rough Terrain Forklift

Distinguishing mark	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.											
	1.2	Manufacturer's type designation		CPCD25-XW33E-RT	CPCD30-XW33E-RT	CPCD35-XW33E-RT	CPCD25-XW98E-RT2	CPCD30-XW98E-RT2	CPCD35-XW98E-RT2	CPCD25-XG72E-RT2	CPCD30-XG72E-RT2	CPCD35-XG72E-RT2			
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel			
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated			
	1.5	Rated capacity/rated load	Q (kg)	2500	3000	3500	2500	3000	3500	2500	3000	3500			
	1.6	Load centre distance	c (mm)	500	500	500	500	500	500	500	500	500			
	1.8	Load distance, centre of drive axle to fork	x (mm)	585	600	600	585	600	600	585	600	600			
	1.9	Wheelbase	y (mm)	1880	1880	1880	1880	1880	1880	1880	1880	1880			
	2.1	Service Weight	kg	4670	5120	5380	4670	5120	5380	4670	5120	5380			
Weight	2.2	Axle loading, laden front/rear	kg	6050/1120	7080/1040	7800/1080	6050/1120	7080/1040	7800/1080	6050/1120	7080/1040	7800/1080			
	2.3	Axle loading, unladen front/rear	kg	2010/2660	2300/2820	2280/3100	2010/2660	2300/2820	2280/3100	2010/2660	2300/2820	2280/3100			
Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic			
	3.2	Tyre size, front		12-16.5-14PR	14-17.5-14PR	14-17.5-14PR	12-16.5-14PR	14-17.5-14PR	14-17.5-14PR	12-16.5-14PR	14-17.5-14PR	14-17.5-14PR			
	3.3	Tyre size, rear		27*10-12-12PR	27*10-12-12PR	27*10-12-12PR	27*10-12-12PR	27*10-12-12PR	27*10-12-12PR	27*10-12-12PR	27*10-12-12PR	27*10-12-12PR			
	3.5	Wheels, number front / rear (x = driven wheels)		2x/2	2x/2	2x/2	2x/2	2x/2	2x/2	2x/2	2x/2	2x/2			
	3.6	Tread, front	b10 (mm)	1250	1250	1250	1250	1250	1250	1250	1250	1250			
Dimensions	3.7	Tread, rear	b11 (mm)	1205	1205	1205	1205	1205	1205	1205	1205	1205			
	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)	10/12	10/12	10/12	10/12	10/12	10/12	10/12	10/12	10/12			
	4.2	Height, mast lowered	h1 (mm)	2215	2350	2350	2215	2350	2350	2215	2350	2350			
	4.3	Free lift	h2 (mm)	140	150	150	140	150	150	140	150	150			
	4.4	Lift	h3 (mm)	3000	3000	3000	3000	3000	3000	3000	3000	3000			
	4.5	Height, mast extended	h4 (mm)	4122	4269	4269	4122	4269	4269	4122	4269	4269			
	4.7	Height of overhead guard (cabin) Std.	h6 (mm)	2390	2420	2420	2390	2420	2420	2390	2420	2420			
		Height of overhead guard (cabin) Opt.	h6 (mm)	2240	2270	2270	2240	2270	2270	2240	2270	2270			
	4.19	Overall length	l1 (mm)	4245	4260	4260	4245	4260	4260	4245	4260	4260			
	4.20	Length to face of forks	l2 (mm)	3025	3040	3040	3025	3040	3040	3025	3040	3040			
	4.21	Overall width	b1 (mm)	1557	1599	1599	1557	1599	1599	1557	1599	1599			
	4.22	Fork dimensions	s/e/l (mm)	40*122*1220	50*122*1220	50*122*1220	40*122*1220	50*122*1220	50*122*1220	40*122*1220	50*122*1220	50*122*1220			
	4.23	Fork carriage DIN 15 173 --- ISO 2328, class/type A,B		B	B	B	B	B	B	B	B	B			
	4.24	Fork-carriage width	b3 (mm)	1150	1150	1150	1150	1150	1150	1150	1150	1150			
	4.25	Distance between fork-arms	b5 (mm)	290-1150	290-1150	290-1150	290-1150	290-1150	290-1150	290-1150	290-1150	290-1150			
	4.31	Ground clearance, laden, below mast	m1 (mm)	235	270	270	235	270	270	235	270	270			
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	240	270	270	240	270	270	240	270	270			
	4.34	Aisle width	Ast (mm)	4905	4920	4920	4905	4920	4920	4905	4920	4920			
	4.35	Turning radius	Wa (mm)	2900	2900	2900	2900	2900	2900	2900	2900	2900			
	Performance data	5.1	Travel speed, laden/unladen	km/h	24/26	26/28	26/28	24/26	26/28	26/28	24/26	26/28	26/28		
		5.2	Lift speed, laden/unladen	m/s	0.620/0.640	0.490/0.510	0.430/0.510	0.620/0.640	0.470/0.510	0.450/0.510	0.620/0.640	0.490/0.510	0.430/0.510		
		5.3	Lowering speed, laden/unladen	m/s	0.500/0.440	0.500/0.450	0.500/0.450	0.500/0.440	0.500/0.450	0.500/0.450	0.500/0.440	0.500/0.450	0.500/0.450		
		5.5	Drawbar pull, laden	N	21000	22000	23000	23000	24000	26000	21000	22000	23000		
		5.7	Gradeability, laden	%	27	22	22	32	30	29	27	22	22		
5.10		Service brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic			
Combustion-engine		Parking brake		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical			
	7.1	Engine manufacturer/type		YANMAR 4TNE98	YANMAR 4TNE98	YANMAR 4TNE98	KUBOTA V2607-CR-TE5B	KUBOTA V2607-CR-TE5B	KUBOTA V2607-CR-TE5B	XINCHAI 4D32XG30-011	XINCHAI 4D32XG30-011	XINCHAI 4D32XG30-011			
		Emission standard		StageIIIA / EPA Tier3	StageIIIA / EPA Tier3	StageIIIA / EPA Tier3	EU StageV / Tier 4f	EU StageV / Tier 4f	EU StageV / Tier 4f	/	/	/			
	7.2	Engine power according to DIN ISO 1585	kw/r/min	42.1/2300	42.1/2300	42.1/2300	47.3/2400	47.3/2400	47.3/2400	45/2500	45/2500	45/2500			
	7.3	Rated speed	N·m/r/min	206/1700	206/1700	206/1700	221.7/1500	221.7/1500	221.7/1500	200/1500 - 1800	200/1500 - 1800	200/1500 - 1800			
	7.4	Number of cylinders/displacement	(-)/(cm ³)	4/3319	4/3319	4/3319	4/2615	4/2615	4/2615	4/3170	4/3170	4/3170			
	7.10	Battery voltage/nominal capacity	V/Ah	12/90	12/90	12/90	12/90	12/90	12/90	12/90	12/90	12/90			
	7.11b	Gear Fwd/Rvs		2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1			
Addition data	10.3	Hydraulic Tank - capacity (drain & refill)	liter	65	65	65	50	50	50	65	65	65			
	10.4	Fuel tank capacity	liter	65	65	65	50	50	50	65	65	65			



2.5-3.5t Mast:(pneumatic)

Type	Model	Max.fork height	Overall height						Free lift				Front Overhang		Tilt range		Capacity max height					
			Lowered (mm)		Extended		Without backrest (mm)		With backrest (mm)		FWD	BWD			Load Center 500mm							
					Without backrest (mm)										With backrest (mm)	ISO 22915-2			ISO 22915-13			
			mm	2.5t	3/3.5t	2.5t	3/3.5t	2.5t	3/3.5t	2.5t	3/3.5t	2.5t	3/3.5t	(°)	(°)	2.5t	3t	3.5t	2.5t	3t	3.5t	
Wide view mast	RTE25/35M300	3000	2215	2350	3782	3993	4122	4269	140	150	140	150	585	600	10	12	2500	3000	3500	2500	3000	3500
	RTE25/35M330	3300	2365	2500	4082	4293	4422	4569	140	150	140	150	585	600	10	12	2500	3000	3500	2500	3000	3400
	RTE25/35M350	3500	2465	2600	4282	4493	4622	4769	140	150	140	150	585	600	10	12	2500	3000	3500	2500	2800	3200
	RTE25/35M370	3700	2615	2700	4482	4693	4822	4969	140	150	140	150	585	600	10	12	2500	3000	3500	2500	2600	2800
	RTE25/35M400	4000	2815	2950	4782	4993	5122	5269	140	150	140	150	585	600	10	12	2500	3000	3400	2100	2400	2500
	RTE25/35M450	4500	3065	3200	5282	5493	5622	5769	140	150	140	150	585	600	10	12	2200	2500	3000	1700	2000	2000
Wide view full free triplex mast	RTE25/35N400	4000	2115	2300	4860	5025	5122	5269	1255	1275	993	1031	603	618	10	12	2500	2900	3300	2000	2300	2400
	RTE25/35N430	4300	2215	2400	5160	5325	5422	5569	1355	1375	1093	1131	603	618	10	12	2400	2700	3000	1900	2100	2200
	RTE25/35N450	4500	2265	2450	5360	5525	5622	5769	1405	1425	1143	1181	603	618	10	12	2200	2500	2900	1700	1900	1900
	RTE25/35N470	4700	2365	2550	5560	5725	5822	5969	1505	1525	1243	1281	603	618	10	12	2000	2300	2700	1400	1500	1500
	RTE25/35N500	5000	2515	2700	5860	6025	6122	6269	1655	1675	1393	1431	603	618	6	6	1900	2100	2500	1100	1200	1200
	RTE25/35N550	5500	2715	2900	6360	6525	6622	6769	1855	1875	1593	1631	603	618	6	6	1500	1900	2300	800	900	900
	RTE25/35N600	6000	2965	3150	6860	7025	7122	7269	2105	2125	1843	1881	603	618	6	6	1200	1600	1900	600	700	700

Note: ISO 22915-2 for industrial use; ISO 22915-13 for rough terrain use.
With integral sideshifter minus 200kg;with sideshifter minus 300kg.