



Hangcha Europe GmbH

Mariechen-Graulich-Straße 12a,
65439 Flörsheim am Main,
Germany

Administration
Tel: 0049-61453769188
E-mail: admin@hangchaeurope.com

Sales Management
Thomas Dittrich
Mob: 0049-16096548808
E-mail: thomas.dittrich@hangchaeurope.com

Technical Support
Thomas Pannke
Mob: 0049-01759284213
E-mail: thomas.pannke@hangchaeurope.com

www.hangchaeurope.com



Folgen Sie uns auf
Instagram



Folgen Sie uns auf
Facebook



Folgen Sie uns auf
YouTube



"Hangcha Forklift"
App herunterladen



ISO14001:2015



ISO9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

HANGCHA Group Co., LTD behält sich das Recht vor, Änderungen bezgl. Farbe, Spezifikationen, Ausstattung und sonstige Details, dierer Bröschüre ohne Vorankündigung vorzunehmen. Fahrzeugfarben können von den Farben in dieser Brochure abweichen.

2025 VERSION 1/COPYRIGHT 2025/07



A Series 3 Wheel Electric Forklift Truck

with capacities of 1,300 to 2,000kg

The World of Hangcha






Customer can order A series 3W 1.6-2.0t with lithium battery power from HANGCHA now.
Lightweight design, flexible, high level of energy efficiency, maintenance-free, provide long service life.

6 YEARS
WARRANTY

INNOVATIVE SOLUTIONS NEW POWER NOW

- / We use square lithium iron phosphate batteries and modules used in large quantities by commercial vehicles in mature economies.
- / The module uses an aluminum alloy frame which is sturdy, lightweight and with excellent heat dissipation.
- / Safe and effective: Charging efficiency as high as 98%, thermal runaway temperature 600 °C or above.
- / Adapted to low temperatures: Comes standard with an electrical heating feature , ensuring normal operation in low temperatures.
- / Quick charging: 2 hours full charge, economic use of each break.
- / Long-working: 4000 charging cycles, capacity retention greater than 75%.
- / Maintenance-free: Battery does not require manual maintenance.
- / Green and clean: Pollution-free, zero emissions.

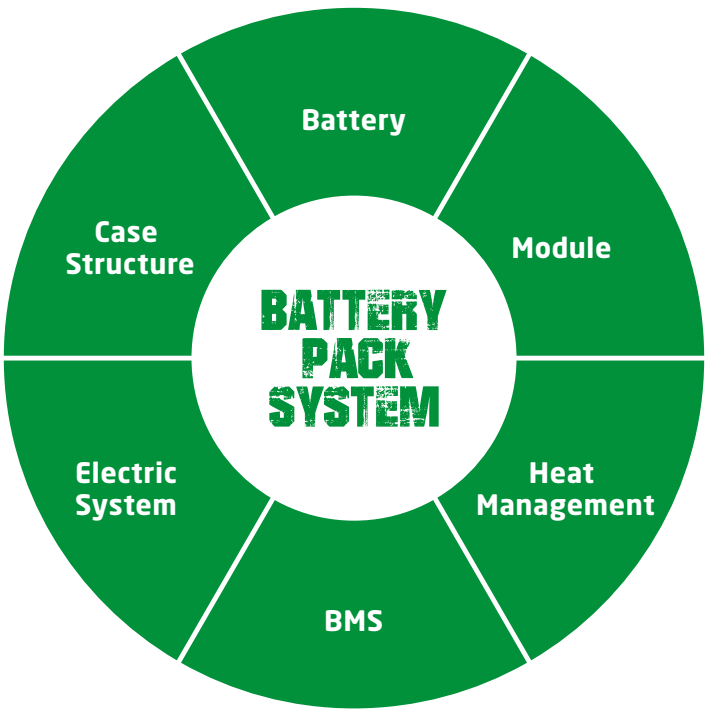

Li-Ion
2 hours
100%

Lead-acid batteries
8-10 hours 100%

Rapid charging and opportunity charging ensure continuous availability of vehicles

Li-Ion powered forklifts are always available. They allow for fast full charging or boost charging (100 % charge in 2 hours). They are maintenance free and do not require a battery change when used for multi-shift operations.

Li-Ion Battery Pack specification

Manufacturers type designation		CPDS16-AD8G-I* CPDS16-AC8G-I* CPDS16-AC8B1-I	CPDS18-AD8G-I* CPDS18-AC8G-I* CPDS18-AC8B1-I	CPDS20-AD8G-I* CPDS20-AC8G-I* CPDS20-AC8B1-I
Battery voltage, capacity	V/Ah	51.52/500	51.52/500	51.52/500
Battery weight	kg	270	270	270

Note: * CE model



Appearance

- / Compact design meets the limited space operation requirement. Eyeball catching designed smooth outline and metal material applied for exposed parts, all provide robust construction of the A series three-pivot electric counterbalance forklift truck.

Maneuverability

- / Front dual separated driving motors can realize the wheels forward or backward independently, the small turning radius is suitable for narrow channel; Imported reducer, high power driving motor provides a reliable and strong performance.

High Efficiency

- / High power pump motor and low noise gear pump, both improve the lifting speed and work efficiency.
- / Regenerative braking during deceleration is more energy saving and effectively .

Comfort

- / Thanks to the new designed adjustable levers, the operator can work more comfortable. New designed dashboard is easy to see and provides friendly human-computer interaction and with running hours, self diagnosis functions and the battery power show.
- / Both the steering column and seat can be adjusted easily, every operator can find the best driving position.
- / Low vibration and suspension seat reduce the driver's fatigue.

Stability

- / Sinking type battery layout provides good stability especially during cornering.
- / The soft landing system protects the forks from dashing against the ground.

Safety

- / Emergency switch is standard specification which meets the Euro safety regulation.
- / Both electronics and hydraulic system are equipped with overloading protection system.
- / Driving speed is automatically reduction during cornering.

Maintenance

- / Full opened battery cover is easy for battery service and changing.
- / The service engineer can remove the front floor board without any tool, it is convenient for the maintenance.

Advance

- / World famous controller, connectors, battery plug and emergency switch are applied to ensure the reliability of the performance and provides easy service.
- / High frequency MOSFET integrated control system provides accurate control of travelling, lifting and better adjustable performance that better matches with the motor. No roll-back on ramp is also provided thanks to MOSFET controller. Motor brake is for regenerative braking during deceleration, direction changing, and downward slope.

Standard Specification

- / High efficiency AC driving motor
- / Multi-functions instrument
- / Front dual driving motors
- / Rubber floor mat
- / Solid tyre
- / Emergency disconnect switch
- / 2-valve inside chassis
- / LED headlight
- / Rear combination LED light
- / Panoramic rearview mirror (in the middle position of the overhead guard)
- / 3 meters duplex wide view mast
- / Adjustable steering column
- / Full electronic controlled travelling, lifting and steering
- / Horn and reversing buzzer
- / File folder
- / CAN-BUS system
- / Low noise gear pump (Brand: Shimadzu, Made in Japan)
- / Full hydraulic steering
- / Soft landing system
- / Non suspension seat: Grammer GS12 with switch
- / ZF reducer

Options

- | | |
|--|--|
| / 3rd or 4th hydraulic function | / Non-marking tyre |
| / 2.5-4.5 meters duplex mast | / Battery charger |
| / 4.3-6.5 meters triplex mast | / Battery side roll-out (Using pallet truck or trolley)(Not for Lithium battery) |
| / Rear working LED light | / Fingertip control on the adjustable armrest |
| / Reversing assist grip with horn button | / Cold store protection(Not for Lithium battery) |
| / Integrated sideshifter | / Suspension seat |
| / Other attachments | / Full closed cabin |
| / Other dimension forks | / Socket for other equipment |
| / Special carriage and backrest | / Blue spot light |
| / Big capacity battery | / OPS system |
| / CATL lithium battery pack | |
| / Toolbox | |



Front dual separated motors



Panoramic rearview mirror



Cover can be easily opened by adjusting the levels forward




The small turning radius is suitable for narrow channel

A Series 3-pivot Electric Forklift Truck

Distinguishing mark	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.									
	1.2	Manufacturers type designation		CPD515-AD5*	CPD516-AD5*	CPD518-AC7G*/D5* CPD518-AC7B1	CPD520-AC7G*/D5* CPD513-AC8B1	CPD513-AC8G*/D8G* CPD513-AC8B1	CPD515-AC8G*/D8G* CPD515-AC8B1	CPD516-AC8G*/D8G* CPD518-AC8B1	CPD518-AC8G*/D8G* CPD518-AC8B1	CPD520-AC8G*/D8G* CPD520-AC8B1	
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		electric	electric	electric	electric	electric	electric	electric	electric	electric	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		seated	seated	seated	seated	seated	seated	seated	seated	seated	
	1.5	Load capacity/rated load	Q (kg)	1500	1600	1800	2000	1300	1500	1600	1800	2000	
Weight	1.6	Load centre distance	c (mm)	500	500	500	500	500	500	500	500	500	
	1.8	Load distance, centre of drive axle to fork	x (mm)	355	355	360	360	355	355	355	360	360	
	1.9	Wheelbase	y (mm)	1250	1358	1358	1466	1250	1250	1358	1358	1466	
	2.1	Service Weight	kg	2980	3120	3240	3470	2860	2980	3120	3240	3470	
Tyres, chassis	2.2	Axle loading, laden front/rear	kg	3890/590	4100/620	4350/690	4750/720	3600/560	3890/590	4100/620	4350/690	4750/720	
	2.3	Axle loading, unladen front/rear	kg	1350/1630	1440/1680	1440/1800	1530/1940	1350/1510	1350/1630	1440/1680	1440/1800	1530/1940	
	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		solid	solid	solid	solid	solid	solid	solid	solid	solid	
	3.2	Tyre size, front		18x7 - 8	18x7 - 8	18x7 - 8	200/50-10	18x7 - 8	18x7 - 8	18x7 - 8	18x7 - 8	200/50-10	
Dimensions	3.3	Tyre size, rear		15x4.5 - 8	15x4.5 - 8	15x4.5 - 8	15x4.5 - 8	15x4.5 - 8	15x4.5 - 8	15x4.5 - 8	15x4.5 - 8	15x4.5 - 8	
	3.5	Wheels, number front rear (x = driven wheels)		2x/2	2x/2	2x/2	2x/2	2x/2	2x/2	2x/2	2x/2	2x/2	
	3.6	Tread, front	b10 (mm)	910	910	910	915	910	910	910	910	915	
	3.7	Tread, rear	b11 (mm)	175	175	175	175	175	175	175	175	175	
	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)	6/6	6/6	5.5/6	5.5/6	6/6	6/6	6/6	5.5/6	5.5/6	
	4.2	Height, mast lowered	h1 (mm)	1995	1995	1995	1995	1995	1995	1995	1995	1995	
	4.3	Free lift	h2 (mm)	145	145	145	145	145	145	145	145	145	
	4.4	Lift	h3 (mm)	3000	3000	3000	3000	3000	3000	3000	3000	3000	
	4.5	Height, mast extended	h4 (mm)	3945	3945	3945	3945	3945	3945	3945	3945	3945	
	4.7	Height of overhead guard STD.	h6 (mm)	2040	2040	2040	2040	2040	2040	2040	2040	2040	
	4.9	Seat height/stand height	h7 (mm)	1000	1000	1000	1000	1000	1000	1000	1000	1000	
	4.12	Coupling height	h10 (mm)	500	500	500	500	500	500	500	500	500	
	4.19	Overall length	l (mm)	2710	2818	2823	3080	2710	2710	2818	2823	3080	
	4.20	Length to face of forks	l2 (mm)	1790	1898	1903	2010	1790	1790	1898	1903	2010	
	4.21	Overall width	b1 (mm)	1086	1086	1086	1120	1086	1086	1086	1086	1120	
	4.22	Fork dimensions	s/e/l (mm)	35/100/920	35/100/920	35/100/920	40/122/1070	35/100/920	35/100/920	35/100/920	35/100/920	40/122/1070	
	4.23	Fork carriage DIN 15 173 --- ISO 2328, class/type AB		ISO2328 2A	ISO2328 2A	ISO2328 2A	ISO2328 2A	ISO2328 2A	ISO2328 2A	ISO2328 2A	ISO2328 2A	ISO2328 2A	
	4.24	Fork-carriage width	b3 (mm)	1000	1000	1000	1000	1000	1000	1000	1000	1000	
	4.25	Distance between fork-arms	b5 (mm)	200/1000	200/1000	240/1000	240/1000	200/1000	200/1000	200/1000	240/1000	240/1000	
4.31	Ground clearance, laden, below mast	m1 (mm)	100	100	100	100	100	100	100	100	100		
4.32	Ground clearance, centre of wheelbase	m2 (mm)	110	110	110	110	110	110	110	110	110		
Performance Data	4.34.1	Aisle width for pallets 1000 x 1200 crossways	As1 (mm)	3134	3237	3237	3342	3134	3134	3237	3237	3342	
	4.34.2	Aisle width for pallets 800 x 1200 lengthways	As1 (mm)	3257	3360	3360	3465	3257	3257	3360	3360	3465	
	4.35	Turning radius	Wa (mm)	1452	1555	1555	1660	1452	1452	1555	1555	1660	
	4.36	Internal turning radius	b13 (mm)	620	680	730	730	620	620	680	730	730	
	5.1	Travel speed, laden/unladen	km/h	16/16	16/16	16/16	15/15	16/16	16/16	16/16	16/16	15/15	
	5.2	Lift speed, laden/unladen	mm/s	0.290/0.470	0.280/0.470	0.270/0.450	0.240/0.450	0.400/0.470	0.390/0.470	0.380/0.470	0.370/0.450	0.350/0.450	
	5.3	Lowering speed, laden/unladen	mm/s	0.460/0.440	0.460/0.440	0.460/0.420	0.470/0.420	0.460/0.440	0.460/0.440	0.460/0.440	0.470/0.420	0.470/0.420	
	5.5	Drawbar pull, laden/unladen	N	3400/3950	3300/3900	3200/3800	3050/3700	3500/4000	3400/3950	3300/3900	3200/3800	3050/3700	
	5.6	Max. Drawbar pull, laden/unladen	N	12000/12000	11600/11500	11500/11400	11200/11000	12000/12000	12000/12000	11600/11500	11500/11400	11200/11000	
	5.7	Gradeability, laden/unladen	%	16/18	16/18	15/17	13/15	16/18	16/18	16/18	15/17	13/15	
	5.8	Max. gradeability, laden/unladen	%	20/20	20/20	18/20	15/18	20/20	20/20	20/20	18/20	15/18	
Electric- engine	5.9	Acceleration time, laden/unladen (0-10m)	s	4.6/4.2	4.7/4.3	4.8/4.4	4.9/4.5	4.5/4.1	4.6/4.2	4.7/4.3	4.8/4.4	4.9/4.5	
	5.10	Service brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	
	5.11	Parking brake		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	
	6.1	Drive motor rating S2 60 min	kW	4.75x2 AC	4.75x2 AC	4.75x2 AC	4.75x2 AC	4.75x2 AC	4.75x2 AC	4.75x2 AC	4.75x2 AC	4.75x2 AC	
	6.2	Lift motor rating at S3 15%	kW	8.6 DC	8.6 DC	8.6 DC	8.6 DC	9.5 AC	9.5 AC	9.5 AC	9.5 AC	9.5 AC	
	6.3	Battery acc. to DIN 43 531/35/36 A,B,C, no		DIN43531 A	DIN43531 A	DIN43531 A	DIN43531 A	DIN43531 A	DIN43531 A	DIN43531 A	DIN43531 A	DIN43531 A	
	6.4	Battery voltage, nominal capacity K5	V/Ah	48/400	48/500	48/500	48/600	48/400	48/400	48/500	48/500	48/600	
	6.5	Battery weight	kg	700	920	920	1000	700	700	920	920	1000	
	6.6	Battery dimensions	l/b/h(mm)	830×522×627	830×630×627	830×630×627	830×738×627	830×522×627	830×522×627	830×630×627	830×630×627	830×738×627	
		Energy consumption acc. to VDI cycle	kWh/h	4.4	4.6	5.0	4.4	4.4	4.4	4.6	5.0	5.5	
Addition data		Min. battery weight	kg	610	850	850	900	610	610	850	850	900	
		Max. battery weight	kg	750	1000	1000	1100	750	750	1000	1000	1100	
	8.1	Type of drive control		MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC	
	9.1	Manufacturer		CURTIS / INMOTION+CURTIS									
	10.1	Operating pressure for attachments	bar	150	150	150	150	140	150	150	150	150	
	10.2	Oil volume for attachments	l/min	35	35	35	35	35	35	35	35	35	
	10.3	Hydraulic Tank - capacity (drain & refill)	liter	24	26	26	29	24	24	26	26	29	
	10.7	Sound level at the driver's ear according to EN / DIN 12 053	dB (A)	72	73	73	74	72	72	73	73	74	
	10.8	Towing coupling, type DIN		φ24 Pin	φ24 Pin	φ24 Pin	φ24 Pin	φ24 Pin	φ24 Pin	φ24 Pin	φ24 Pin	φ24 Pin	

AC7: means Curtis AC traveling system with DC Pump system, semi-AC system AC8: means Curtis AC traveling system with AC Pump system, full-AC system
AZ5: means ZAPI AC traveling system with DC Pump system, semi-AC system AZ6: means ZAPI AC traveling system with AC Pump system, full-AC system
AD5: means Inmotion AC traveling system with DC Pump system, semi-AC system AD6: means Inmotion AC traveling system with AC Pump system, full-AC system
★ CE model

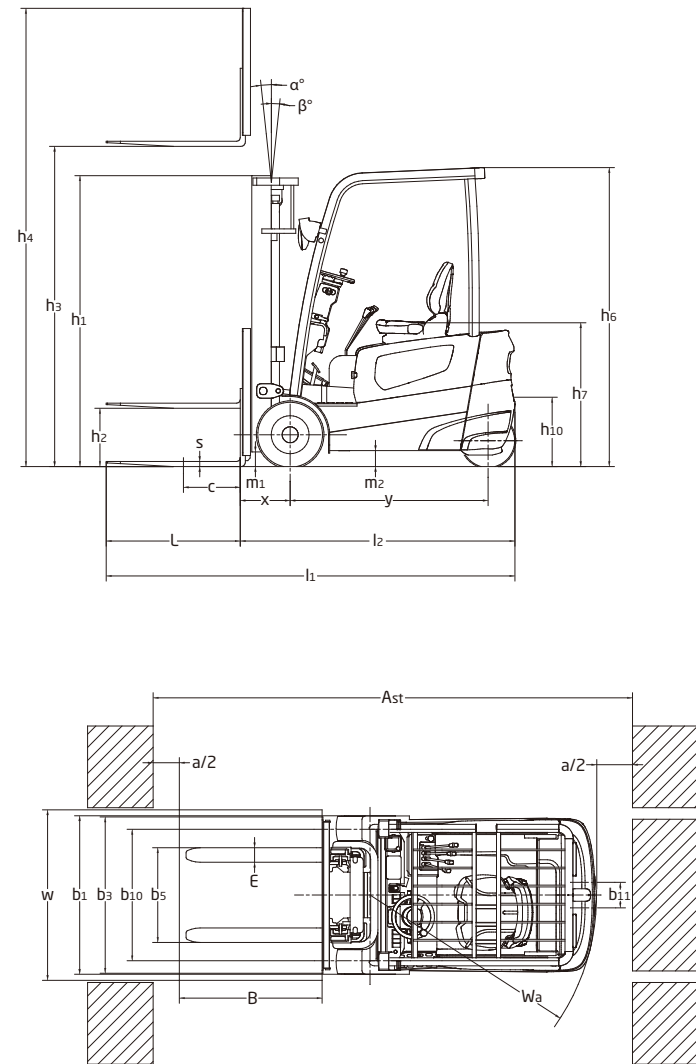

a=200mm safety clearance

$$A_{st} = a + W a + \sqrt{(X+B)^2 + (W/2)^2}$$

X: Load distance
B: Length of load or forks which is longer

