



HANGCHA GROUP CO., LTD.

Factory site: 666 Xiangfu Road,
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88926789 88132890

sales@hcforklift.com
www.hcforklift.com



Follow us on
Facebook



Follow us on
YouTube



Follow us on
WeChat



Download "Hangcha
Forklift" App



ISO14001:2015



ISO9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

2025 VERSION 1/COPYRIGHT 2025/09

Mini Self-propelled Scissor Lifts (Electric Motor Drive)

Aerial work platform



The World of Hangcha
SINCE 1956





Designed to be used in buildings

/ The working height can perfectly adapt to the needs of building working.

Mini Size

/ The compact size makes the machine gets into the elevator with free access.

Light Weight

/ The weight is very light, which can meet the load limit of elevator and better protect the ground.

Large Capacity

/ Though the self-weight is light , it has a large capacity, the machine can allow two peoples working together.

High Efficiency

/ Equipped with efficient fully electrified DC drive system, more durable.

Low Failure Rate

/ Simple and clear system, drawer structure, easier maintenance, lower use cost.

High Rewarding


/ Transport and procurement costs are lower, and rental prices are comparable to regular models.

Green Environment Protection

/ Electric drive walking system, zero emission, low noise, more suitable for indoor use.



Control system

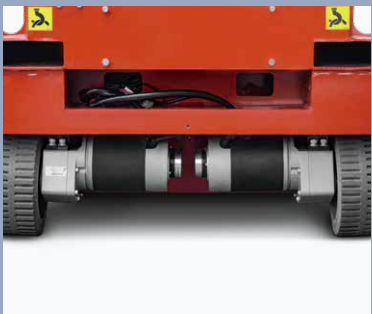

Motor and brake



Explosion proof valve,To prevent the machine falling when the oil pipe is leaking



Extension platform



The parts are well located



Anti-overturning system, When the machine raises to more than 2m, this system will work automatically, to protect the machine from overturning while walking at un-leveling ground



Manual lowering handle, When the operation system failed or the battery power is too low to let the platform decline, we can use this handle to lower the machine



LCD screen, used to display fault code and adjust parameters



Supporting arms, To protect the operator when he is doing repair or maintenance job




Mini Self-propelled Scissor Lifts (Electric Motor Drive) Specification

01	Manufacturer		HANGCHA GROUP CO.,LTD.	
02	Model		60XEND	76XEND
03	Working height	(m/in)	5.9/233	7.6/300
04	Platform height	(m/in)	3.9/153	5.6/220
05	Overall length	(m/in)	1.44/57	1.52/60
06	Overall width	(m/in)	0.76/30	0.81/32
07	Overall height	(m/in)	2.08/81.8	2.18/85.8
08	Height with rails folded	(m/in)	1.71/67.3	1.81/71.3
09	Platform size	(m/in)	1.29×0.7/50.8×27.5	1.37×0.7/54×27.5
10	Platform extension size	(m/in)	0.6/23.6	0.6/23.6
11	Ground clearance	(m/in)	0.06/2.4	0.06/2.4
12	Turning radius inside	(m/in)	0.4/15.7	0.45/17.7
13	Turning radius outside	(m/in)	1.55/61	1.6/63
14	Rated load	(kg/lb)	250/551	230/507
15	Load on extension	(kg/lb)	113/250	113/250
16	Batteries	(V,AH)	24,80	24,80
17	Weight ±30	(kg/lb)	900/1984	1270/2910
18	Travel speed km/h	(mph)	0~4(0~2.48)	0~4(0~2.48)
19	Lift time	(s)	32	26
20	Lowered time	(s)	27	21
21	Tyre		Non-mark Tyres	Non-mark Tyres
22	Maximum slope		2°/3°	1.5°/3°
23	Gradeability		30%	30%
24	Working area		indoor 0km/h(0mph) outdoor 12.5km/h(7.77mph)	indoor 0km/h(0mph) outdoor 12.5km/h(7.77mph)

Mini Self-propelled Scissor Lifts (Electric Motor Drive) Specification

01	Manufacturer		HANGCHA GROUP CO.,LTD.	
02	Model		HS0607D	HS0708D
03	Working Height	m/in	5.9/232	7.6/299
04	Platform Height	m/in	3.9/154	5.6/220
05	Overall length	m/in	1.44/56.7	1.52/59.8
06	Overall width	m/in	0.76/29.9	0.81/31.9
07	Overall height (Rails Up)	m/in	2.13/83.9	2.17/85.4
08	Overall height (Rails Down)	m/in	1.76/63.3	1.80/70.90
09	Platform size	m/in	1.29×0.7 / 50.8×27.6	1.37×0.7 / 53.9×27.6
10	Platform extension size	m/in	0.6/23.6	0.6/23.6
11	Capacity	kg/lb	250/551	230/507
12	Capacity on extension platform	kg/lb	113/249	113/249
13	Max. number of workers		indoor 2/outdoor 1	indoor 2
14	Ground clearance (fall)	m/in	0.07/2.76	0.07/2.76
15	Ground clearance (rise)	m/in	0.015/0.59	0.015/0.59
16	Wheelbase	m/in	1.06/41.7	1.15/41.7
17	Minimum turning radius(Inside/Outside)	m/in	0.4/1.55 / 15.7/61.0	0.45/1.6 / 17.7/63.0
18	Lifting/Driving motor	V/kW	DC24/1.2 DC2*24/0.45	DC24/2.2 DC2*24/0.55
19	Drive speed (Stowed)	km/h / mph	4/2.49	4/2.49
20	Drive speed (lifted)	km/h / mph	0.5/0.31	0.6/0.37
21	Gradeability	%	30	30
22	Drive/steering		2×2	2×2
23	Max. Working Slope	°	1.5 /3	1.5/3
24	Battery (Lead acid)	V/Ah	2×12/100	2×12/100
25	Battery (Lithium)	V/Ah	24/105	24/105
26	Charger	V/A	24/10	24/10
27	Tire	mm/in	φ305/100 / 12×4	φ305/100 / 12×4
28	Dead weight	kg/lb	1080/2380	1480/3263

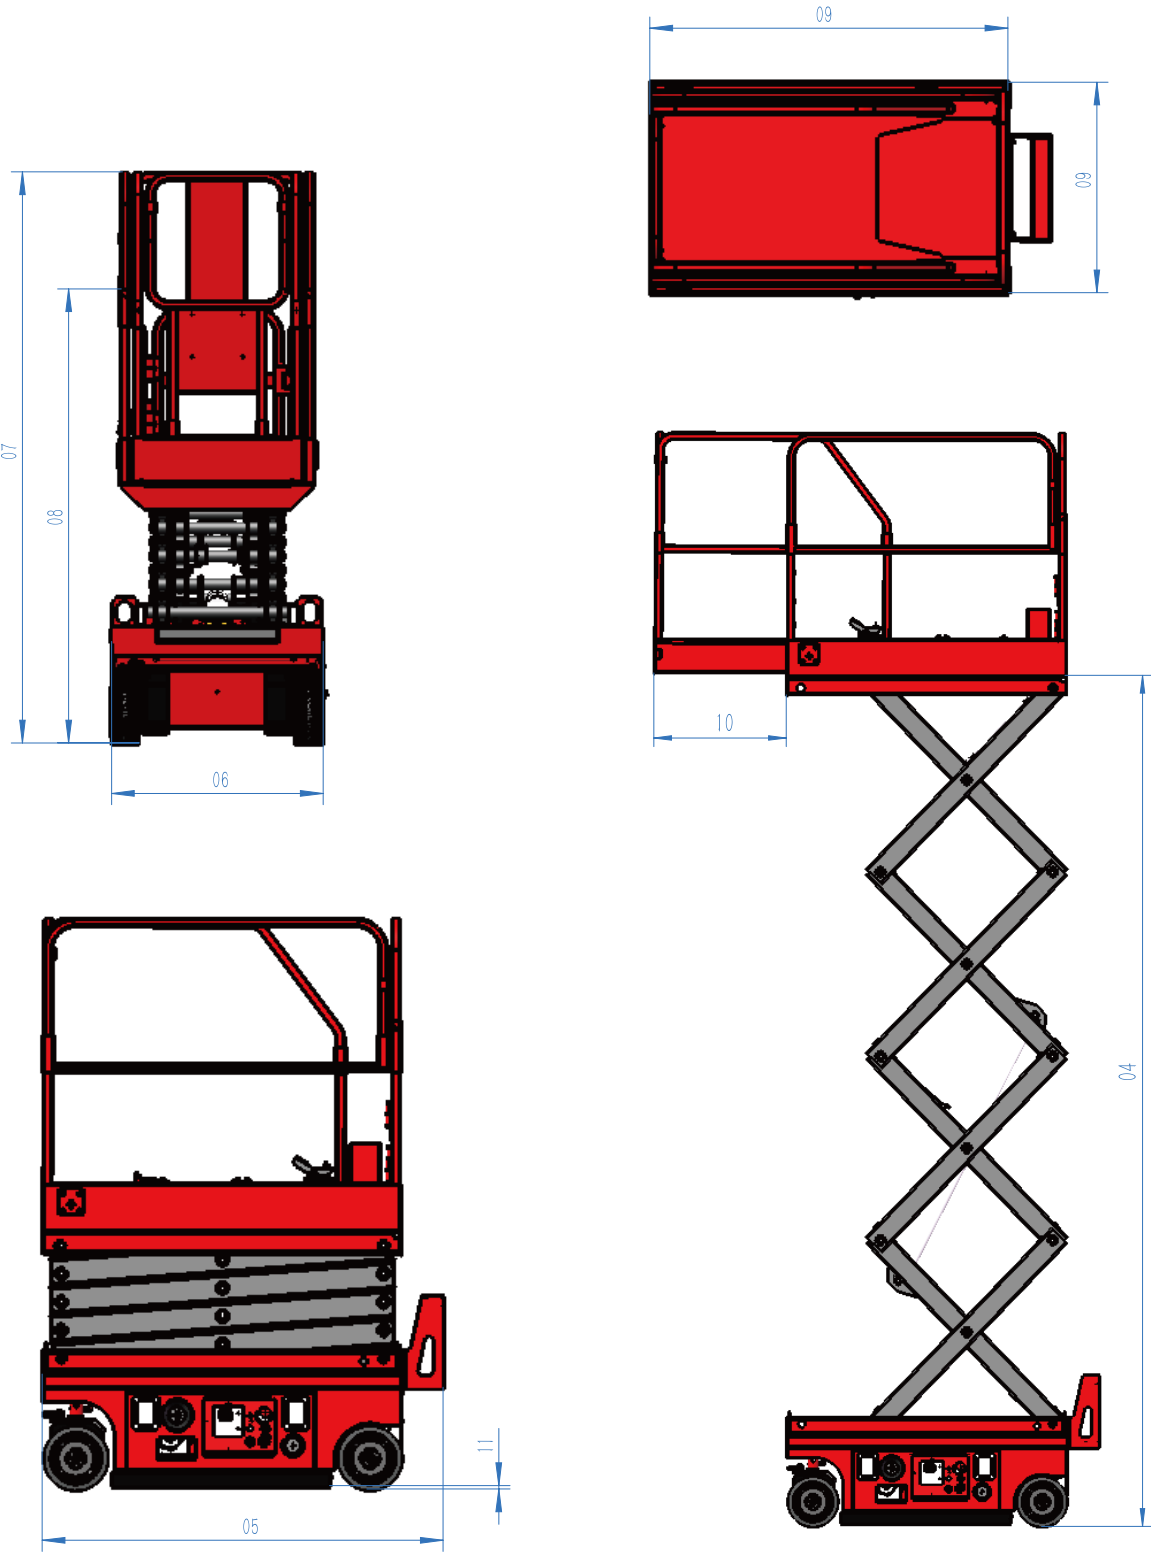



HANGCHA GROUP CO., LTD.

Factory site: 666 Xiangfu Road,
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88926789 88132890

sales@hcforklift.com
www.hcforklift.com



Follow us on
Facebook



Follow us on
YouTube



Follow us on
WeChat



Download "Hangcha
Forklift" App



ISO14001
ISO14001:2015



ISO9001
ISO9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

2025 VERSION 4/COPYRIGHT 2025/07

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



Self-propelled Electric Scissor Lifts

Aerial work platform




The World of Hangcha

Self-propelled Electric Scissor Lifts

HANGCHA self-propelled electric scissor lifts are the high efficient,safe and ideal solution for modern industry. Ideal for maneuvering in tight Spaces,they're excellent for indoor and outdoor application,all the functions, lifting, lowing, steering, forward and backward are under operator's control. Easy maintenance and service after opening the battery cover, all key parts are easy access. With low noise level, and high reliability, HANGCHA self-propelled electric scissor lifts are always your best partner.



Easy/
Efficiency/
Economy

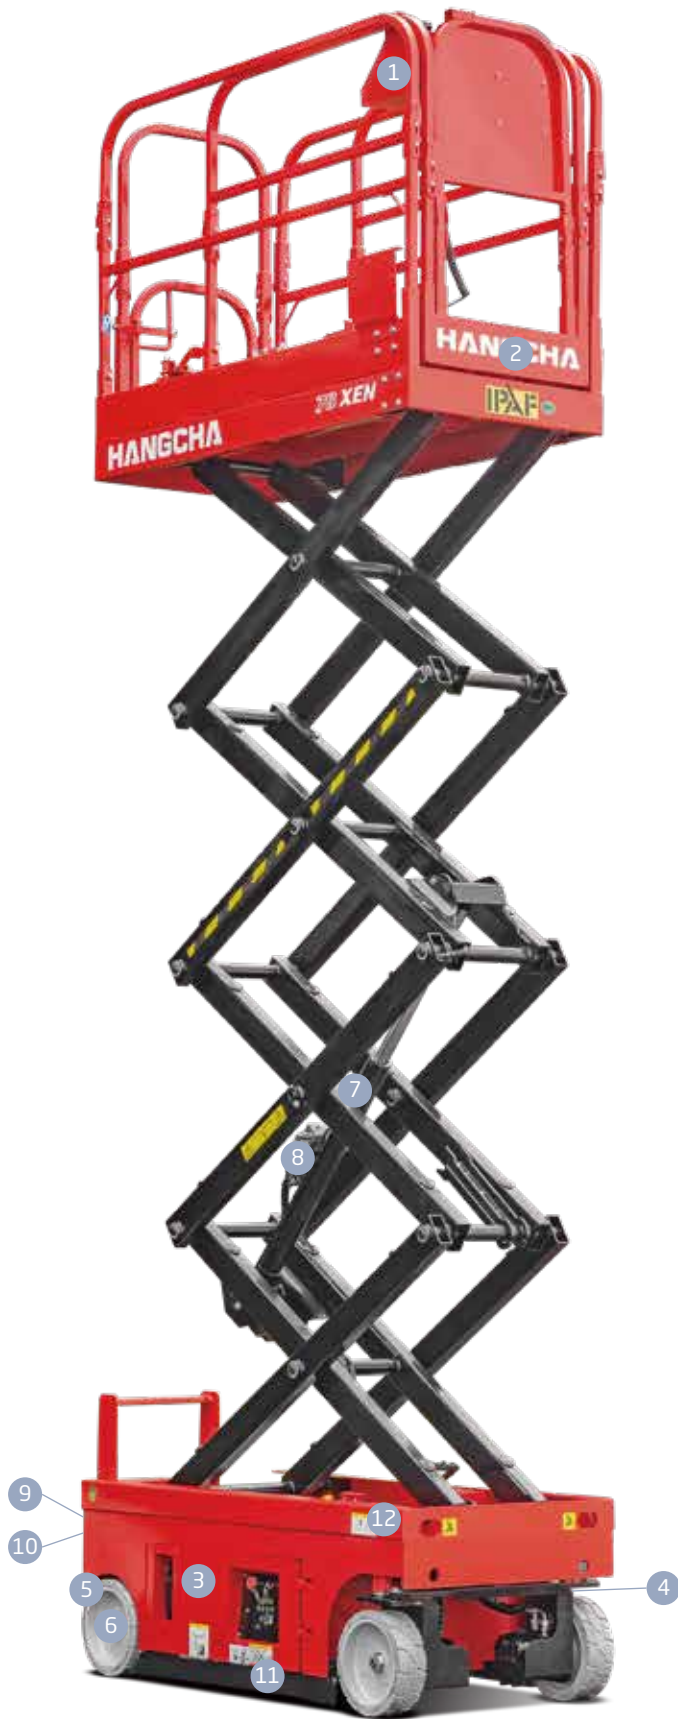

Joystick(HANGCHA)



Extension platform



Hydraulic and electric system



Battery



Brake



Traction motor



Supporting arms: To protect the operator when he is doing repair or maintenance job



Explosion proof valve: To prevent the machine falling when the oil pipe is leaking



Manual lowering valve:When the operation system failed or the battery power is too low to let the platform decline, we can use this valve to lower the machine



Manual release valve: When the machine can not move, you can push the machine after pressing this valve



Anti-overturning system: When the machine raises to more than 6.5ft, this system will work automatically, to protect the machine from overturning while walking at un-leveling ground.



Angle sensor: when it is lifting and walking on the slope, the sensor will automatically judge the status of the machine, if the angle is larger than the rated angle, it will alarm to remind the operator.

Characteristics

- / The proportional control system: Control the speed Of Traveling, lifting and lowering as you need.
- / Control box: This box is including the function Of Traveling and lifting, when you use the joystick, you can Operate the machine With only one hand.
- / Self-leveling sensor. When the degree is more than 1.5° (horizontal direction)/ 3°(vertical direction), it will alarm.
- / LED display: Easy for maintenance, you can do the trouble shooting without another handle unit.

Standard Equipment

- / The lifting system
- / The proportional control
- / Anti-overturning system
- / Control box
- / Internal Charger
- / Hour meter
- / Alarm light
- / Maintenance free battery(Lead-acid)

Options

- / Working lights(two lights)
- / Socket device on the basket
- / Leakage protector for socket
- / Beeper
- / Warning tape
- / Anti-overload system(Required by CE)
- / Imported brand control system
- / Air pipe to basket
- / Anti-explosion modification
- / Special color customization

Application

- / Locomotive maintenance station, airport, power station, gym, big company ect.

AC hydraulic drive

- / Safety: Fully sealed AC system, sensor real-time monitoring of the whole machine, more secure use.
- / High efficiency: AC system, high conversion efficiency, energy consumption is 15-20% lower than DC motor, the efficiency of the whole machine is improved by 8-10%.
- / Waterproof: The fully sealed AC system is customized according to the working condition of the high-altitude working platform. The waterproof grade is IP67, and the waterproof ability is good.
- / Maintenance-free: brushless motor design, standard lithium battery power, 5 years warranty, life maintenance free.
- / Easy maintenance: rotary side door and intelligent control system, more convenient maintenance.



78XEN



100XENS



160XEN



Battery



Standard: Maintenance free battery (lead acid)				
	65XEN	78XEN	80XENS	100XENS
Battery	24V290Ah	24V290Ah	24V290Ah	24V290Ah

Standard: Maintenance free battery (lead acid)							
	80XEN	100XEN	120XEN	140XEN	160XEN	160XENS	160XEN-P
Battery	24V290Ah	24V290Ah	24V290Ah	24V290Ah	24V290Ah	24V290Ah	24V290Ah



Option: Lithium battery				
	65XEN	78XEN	80XENS	100XENS
Battery(HANGCHA)	25.6V,150Ah	25.6V,150Ah	25.6V,150Ah	25.6V,150Ah

Option: Lithium battery						
	80XEN	100XEN	120XEN	140XEN	160XEN	160XENS
Battery(HANGCHA)	25.6V,230Ah	25.6V,230Ah	25.6V,230Ah	25.6V,230Ah	25.6V,230Ah	25.6V,230Ah

Self-propelled Electric Scissor Lifts

01	Manufacturer	HANGCHA GROUP CO.,LTD.											
02	Model		65XEN	78XEN	80XENS	100XENS	80XEN	100XEN	120XEN	140XEN	160XEN	160XENS	160XEN-P
03	Maximum load capacity(outdoor/indoor)	kg	320	230	380	230	450	450	320	320	230	230	350
04	Maximum load capacity of extended platform	kg	113	113	113	113	113	113	113	113	113	113	120
05	Maximum number of workers		indoor2 outdoor1	indoor2 outdoor1	indoor2	indoor2	indoor2 outdoor1	indoor2 outdoor1	indoor2 outdoor1	indoor2	indoor2	indoor2	indoor2
06	Height,working	m	6.5	7.8	8	10	8	10	12	13.8	15.7	15.7	15.7
07	Height, platform	m	4.5	5.8	6	8	6	8	10	11.8	13.7	13.7	13.7
08	Length	m	1.89	1.89	2.48	2.48	2.48	2.48	2.48	2.48	2.84	2.84	2.84
09	Width	m	0.81	0.81	0.81	0.81	1.15	1.15	1.15	1.15	1.4	1.25	1.4
10	Height(Guardrail Unfolded)	m	2.09	2.2	2.21	2.35	2.22	2.36	2.49	2.62	2.62	2.62	2.77
11	Height(Guardrail Folded)	m	1.66	1.77	1.77	1.91	1.66	1.79	1.92	2.05	2.05	2.05	2.23
12	Working dimensions	m	1.67*0.76	1.67*0.76	2.27*0.76	2.27*0.76	2.27*1.14	2.27*1.14	2.27*1.14	2.27*1.14	2.64*1.14	2.64*1.14	2.64X1.12
13	Length, extended maximum	m	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
14	Wheel base	m	1.36	1.36	1.87	1.87	1.87	1.87	1.87	1.87	2.22	2.22	2.22
15	Ground distance	mm	77/16	77/16	100/16	100/16	100/20	100/20	100/20	100/20	100/20	100/20	100/20
16	Turning radius(inside)	m	0	0	0	0	0	0	0	0	0	0	0
17	Turning radius(outside)	m	1.64	1.64	2.1	2.1	2.2	2.2	2.2	2.2	2.7	2.7	2.7
18	Drive speeds	km/h	0-3.5	0-3.5	0-3.5	0-3.5	0-3.5	0-3.5	0-3.5	0-3.5	0-3	0-3	0-3
19	Up time	s	20±2	20±2	25±2	30±2	30±2	35±3	50±3	55±5	65±5	65±5	65±5
20	Down time	s	25±4	20±4	30±4	28±5	40±5	35±5	60±5	55±7	68±7	68±7	68±7
21	Lifting speed (unladen)	m/s	0.16-0.19	0.21-0.26	0.18-0.21	0.21-0.24	0.15-0.21	0.18-0.21	0.16-0.18	0.17-0.21	0.17-0.2	0.17-0.2	0.17-0.2
22	Descending speed (unladen)	m/s	0.12-0.16	0.19-0.29	0.14-0.18	0.2-0.29	0.11-0.14	0.17-0.22	0.13-0.16	0.17-0.21	0.16-0.2	0.16-0.2	0.16-0.2
23	Motor model		JXQD-3.5-NG	JXQD-3.5-NG	JXQD-3.5-NG	JXQD-3.5-NG	JXQD-3.5-NG	JXQD-3.5-NG	JXQD-3.5-NG	JXQD-3.5-NG	JXQD-3.5-NG	JXQD-3.5-NG	JXQD-3.5-NG
24	Motor rated power	kw	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
25	Charger	V/A	24/36	24/36	24/36	24/36	24/36	24/36	24/36	24/36	24/36	24/36	24/36
26	Maximum slope rating	%	25	25	25	25	25	25	25	25	25	25	25
27	Maximum allowable inclination	°	1.5/3°	1.5/3°	1.5/3°	1.5/3°	1.5/3°	1.5/3°	1.5/3°	1.5/3°	1.5/3°	1.5/3°	1.5/3°
28	Tire size	mm	305*100	305*100	381*127	381*127	381*127	381*127	381*127	381*127	381*127	381*127	381*127
29	Weight	kg	1390	1470	2000	2170	2130	2310	2710	3000	3240	3240	3670

