

# Turret Stockpicker

with capacity of 2,200 to 3,500lbs



## Hangcha Europe GmbH

Mariechen-Graulich-Straße 12a,  
65439 Flörsheim am Main,  
Germany

### Administration

Tel: 0049-61453769188  
E-mail: admin@hangchaeurope.com

### Sales Management

Thomas Dittrich  
Mob: 0049-16096548808  
E-mail: thomas.dittrich@hangchaeurope.com

### Technical Support

Thomas Pannke  
Mob: 0049-01759284213  
E-mail: thomas.pannke@hangchaeurope.com

[www.hangchaeurope.com](http://www.hangchaeurope.com)



Available on the iPhone  
 App Store  
Available on Google play  
 Google play

Folgen Sie uns auf  
Instagram

Folgen Sie uns auf  
Facebook

Folgen Sie uns auf  
YouTube  
"Hangcha Forklift"  
App herunterladen



HANGCHA trucks conform  
to the European Safety  
Requirements.

2024 VERSION 2/COPYRIGHT 2024/04

HANGCHA Group Co., LTD behält sich das Recht vor, Änderungen bezgl. Farbe, Spezifikationen, Ausstattung und sonstige Details, dierer Bröschüre ohne Vorankündigung vorzunehm. Fahrzeugfarben können von den Farben in dieser Brochure abweichen.

The World of Hangcha

# TURRET STOCKPICKER

The 2,200-3,500lbs man-up tri-lateral stacker for narrow aisles and high bay warehouses can meet the needs of customers for operations in narrow aisles and high stacking heights. Featuring a high lift, high load capacity and small turning radius, as well as advanced performance, easy operations, high safety and reliability, etc., it is an ideal solution for material handling, stacking and picking in high level warehouse.



## SIMPLY ROBUST. SIMPLY RELIABLE.

### Appearance

/ Streamlined surface modelling, smooth profile outlines, attractive and agreeable.

### Stability

/ Wide body structure design allows the stacker to have good stability.

/ Frame and mast made of high-strength framework structure and low center of gravity enable good stability.




# MAXIMUM EFFICIENCY



- / The narrow aisles required for operations and the fork lift height up to 483 inch maximize the space availability of your warehouses.
- / The high lift mast boasts high load capacity and improved stacking efficiency.
- / The high-power AC oil pump motor and the large-displacement silent gear pumps are used to greatly increase the lifting and lowering speed, as well as its operating efficiency.
- / The energy-saving electro-hydraulic control hydraulic system makes the whole stacker energy-saving and efficient and enables the battery to support longer operating hours.
- / With multi-speed models, the stacker is adapted to different operating conditions.


More Height  
**483"**

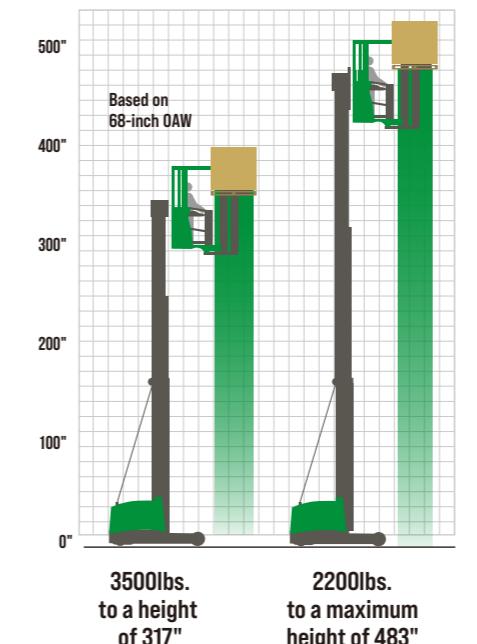

How HANGCHA VNA delivers space savings


#### Traditional Sit-Down/ Counterbalance:

Aisle width: 144"  
Pallet levels: 4  
Pallet positions: 144

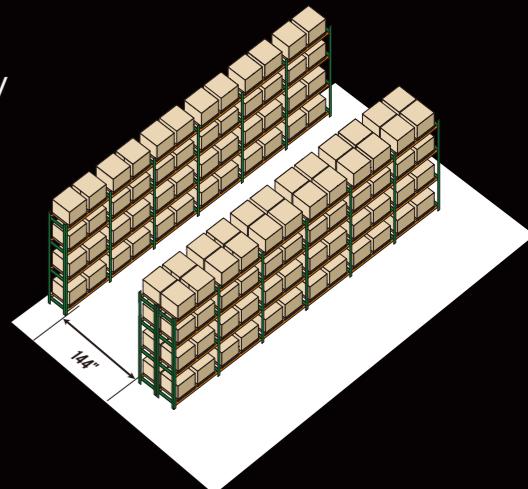


#### Narrow Aisle Pantograph Single Reach Truck

Aisle width: 108"  
Pallet levels: 7  
Pallet positions: 336  
**133% more capacity**

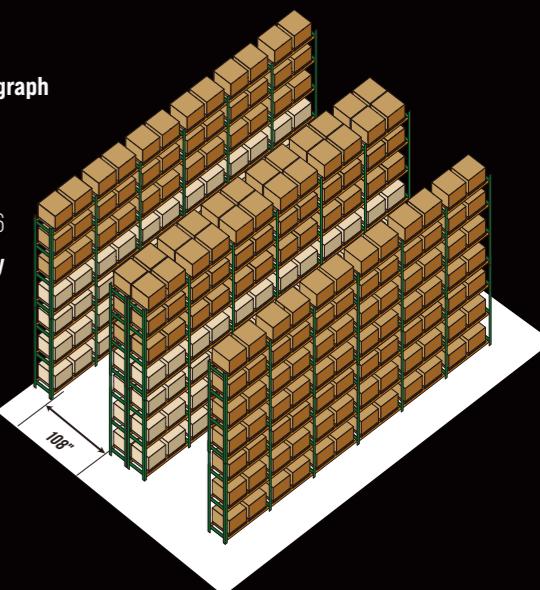

#### Very Narrow Aisle

Aisle width: 68"  
Pallet levels: 8  
Pallet positions: 480  
**233% more capacity**

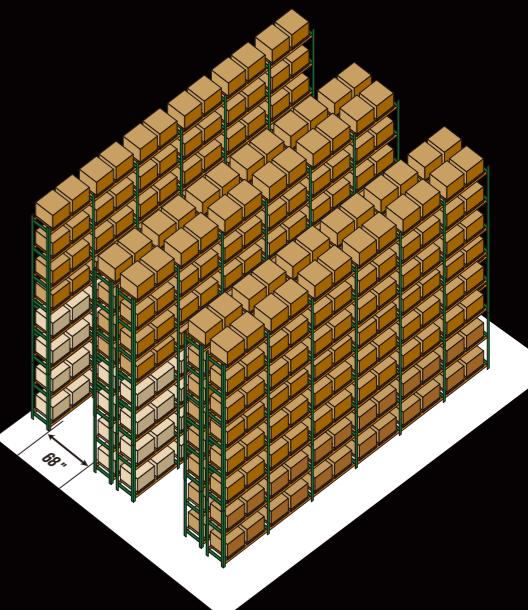




# HIGH PERFORMANCE IN HIGH RACKS.

## Advancement

- / Electromagnetic brake is used to realize intelligent braking allows for more efficient and safer braking.
- / With the advanced electro-hydraulic control system, the traveling speed is automatically associated with the lifting height and turning angle; The load weight is automatically associated with the lifting height; Thus the fork position is intelligently identified and the traveling speed is controlled.
- / The integrated mechanical, electrical and hydraulic control achieves the step-less speed regulation of the driving and the fork movement, allowing for more precise and stable control.
- / The large-screen LCD display and the gauges with fault self-diagnosis functions can accurately display information in harsh environments.
- / With efficient and precise adjustment performance, the newly equipped AC control system supports longer operating hours after being charged once.
- / The dynamic variable hydraulic system enables lowered oil temperature, being energy-saving and efficient.




*The fork has high lifting and lowering speeds and high operating efficiency.*

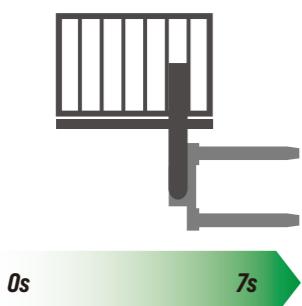

### Traverse Speed

Complete full traverse in 7 seconds.

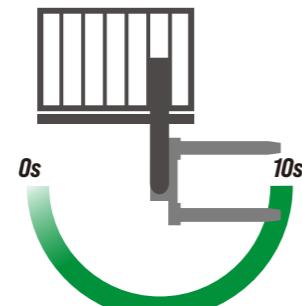

### Pivot Speed

Complete a full, 180-degree pivot in 10 seconds.



## Reliability and safety


- / The low center of gravity at three pivots and the high strength of the main force-bearing components such as frame and mast are designed to meet heavy-duty operating conditions.
- / The main electrical components such as the motor controller, contactor, power plug and emergency cut-off switch are all products of well-known brands.
- / The AC power system has high efficiency, complete protection functions and greatly improved reliability and service life.
- / The optional front and rear wheel braking systems allowing large braking torque are suitable for indoor slippery roads.
- / The optimized design of the wide-view mast enables the operator to get a better view and thus operate the stacker more safely.



*The double safety pedals, left and right guardrails, automatic induction joystick and other active and passive safety systems are equipped to prevent hazards caused by mis-operation.*

## Auto Positioning System

Takes the most effective route to the next rack location.

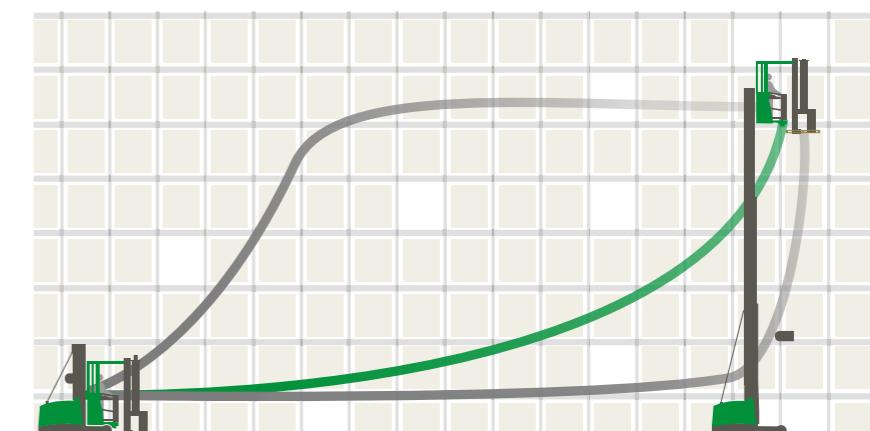

- / Increased Productivity
- / Increased Pick Accuracy

- / Reduced Operator Fatigue
- / Flexibility

# EXCELLENT ERGONOMIC

## Comfort


- / Electro-hydraulic proportional integrated control system allows for more accurate and smooth operations.
- / EPS ( Electric Power Steering ) makes steering more gentle and comfortable.
- / The joystick can be adjusted according to the operator's using habits.
- / A new integrated instrument has complete functions and clear readings.



You can conveniently change the driving mode between stand-on type and seated type.



Low step on height for easy on and off.

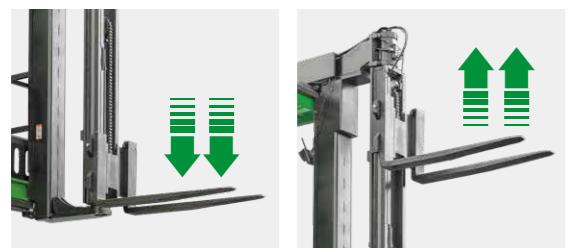

Equipped with the electro-hydraulic control buffer system, the fork slows down automatically when arriving at an end of any position to reduce the impact.



The ergonomically arranged joystick, instruments and switches make operations more comfortable and flexible.

## Maintainability

- / The brushless AC motor is maintenance-free and significantly reduces the operating costs.
- / The fully open door enables easy repair, maintenance and commissioning.
- / The battery removed side roll out enables easy repair and maintenance.
- / The electronically controlled electrical components are placed together and are highly integrated.



## Options

- / Different battery (compartment) sizes
- / Forks of different specifications
- / Different lift height
- / Blue light
- / Fan
- / 12 V power plug
- / Fire extinguisher
- / Monitoring system
- / Wire guided
- / Guide roller
- / Load height limiting device



## Standard Specification

- / AC motor and controller
- / Stand-on type & seated type
- / Electro-hydraulic proportional valve system
- / Low-noise gear oil pump
- / Battery side roll out
- / Reverse buzzer
- / Multi-function instrument
- / Fork height display
- / Alarm light
- / LED light in the cabin
- / Safety rope
- / Polyurethane wheel tyre
- / Laneway mode
- / Electric power steering system
- / Electromagnetic parking brake
- / Security operating system
- / Travelling speed control during lifting
- / Central sideshift
- / Chain looseness reminder
- / Travelling speed control at corner
- / Lateral barriers left and right

## Technical data

Distinguishing mark	1.1	Manufacturer			HANGCHA GROUP CO.,LTD.				
	1.2	Manufacturer's type designation			CSDS10-XC1-NA	CSDS12-XC1-NA	CSDS14-XC1-NA	CSDS16-XC1-NA	
	1.3	Drive			Electric	Electric	Electric	Electric	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker			standing&seated	standing&seated	standing&seated	standing&seated	
	1.5	Rated capacity/rated load	Q	lb (kg)	2200(1000)	2645(1200)	3000(1361)	3500(1588)	
	1.6	Load centre distance	c	in (mm)	24(600)	24(600)	24(600)	24(600)	
	1.8	Load distance, centre of drive axle to fork	x	in (mm)	14.5(366)	14.5(366)	14.5(366)	14.5(366)	
	1.9	Wheelbase	y	in (mm)	see table 1	see table 1	see table 1	see table 1	
	1.10	Centre of drive wheel / counterweight	z	in (mm)	11(280)	11(280)	11(280)	11(280)	
Weight	2.1	Service Weight		lb (kg)	7325	7325	7425	8105	
	Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		in (mm)	Polyurethane	Polyurethane	Polyurethane	Polyurethane
		3.2	Tyre size, front			Φ14x8.1(Φ355x205)	Φ14x8.1(Φ355x205)	Φ14x8.1(Φ355x205)	Φ14x8.1(Φ355x205)
		3.3	Tyre size, rear			Φ16x6.7(Φ406x170)	Φ16x6.7(Φ406x170)	Φ16x6.7(Φ406x170)	Φ16x6.7(Φ406x170)
		3.5	Wheels, number front / rear (x = driven wheels)			2/1x	2/1x	2/1x	2/1x
		3.6	Tread, front	b10	in (mm)	50(1270)	50(1270)	50(1270)	50(1270)
Dimensions	4.2	Height, mast lowered	h1	in (mm)	127(3230)	127(3230)	131(3330)	131(3330)	
	4.4	Lift	h3	in (mm)	138(3515)	138(3515)	138(3515)	138(3515)	
	4.5	Height, mast extended	h4	in (mm)	253(6435)	253(6435)	253(6435)	253(6435)	
	4.7	Height of overhead guard (cabin)	h6	in (mm)	103(2610)	103(2610)	103(2610)	103(2610)	
	4.8	Platform Floor Height	h7	in (mm)	16(410)	16(410)	16(410)	16(410)	
	4.11	Auxiliary lift	h9	in (mm)	71(1810)	71(1810)	71(1810)	71(1810)	
	4.14	Standing height raised	h12	in (mm)	154.5(3925)	154.5(3925)	154.5(3925)	154.5(3925)	
	4.19	Overall length	l1	in (mm)	see table 1	see table 1	see table 1	see table 1	
		Length to face of forks	l2	in (mm)	see table 1	see table 1	see table 1	see table 1	
	4.21	Overall width	b1/b2	in (mm)	47.6(1210) / 58.1(1475)	47.6(1210) / 58.1(1475)	47.6(1210) / 58.1(1475)	47.6(1210) / 58.1(1475)	
	4.22	Fork dimensions	s/e/l	in (mm)	2x4.8x45.3(50x122x1150)	2x4.8x45.3(50x122x1150)	2x4.8x45.3(50x122x1150)	2x4.8x45.3(50x122x1150)	
	4.24	Fork-carriage width	b3	in (mm)	26.4(670)	26.4(670)	26.4(670)	26.4(670)	
	4.25	Distance between fork-arms	b5	in (mm)	25.6(650)	25.6(650)	25.6(650)	25.6(650)	
	4.29	Reach, sideways		in (mm)	50(1270)	50(1270)	50(1270)	50(1270)	
	4.31	Ground clearance, laden, below mast	m1	in (mm)	3.2(80)	3.2(80)	3.2(80)	3.2(80)	
	4.32	Ground clearance, centre of wheelbase	m2	in (mm)	3.2(80)	3.2(80)	3.2(80)	3.2(80)	
	4.35	Turning radius	Wa	in (mm)	see table 1	see table 1	see table 1	see table 1	
	4.38.1	Total lift	s+h3+h9	in (mm)	211.6(5375)	211.6(5375)	211.6(5375)	211.6(5375)	
4.38.2	Order picking height		in (mm)	217.5(5525)	217.5(5525)	217.5(5525)	217.5(5525)		
4.38.7	Inner clear height of operator compartment		in (mm)	83.5(2120)	83.5(2120)	83.5(2120)	83.5(2120)		
Performance data	5.1	Travel speed, laden/unladen		mph(km/h)	72/7.5(11.5/12)	72/7.5(11.5/12)	6.9/7.5(10.5/12)	6.9/7.5(10.5/12)	
	5.2	Lift speed, laden/unladen		fpm(m/s)	104.3/120(0.53/0.61)	104.3/120(0.53/0.61)	102.4/120(0.52/0.61)	102.4/120(0.52/0.61)	
	5.3	Lowering speed, laden/unladen		fpm(m/s)	98.5/88.6(0.5/0.45)	98.5/88.6(0.5/0.45)	98.5/88.6(0.5/0.45)	98.5/88.6(0.5/0.45)	
	5.4	Traverse speed, laden/unladen		fpm(m/s)	37.4/39.4(0.19/0.2)	37.4/39.4(0.19/0.2)	37.4/39.4(0.19/0.2)	37.4/39.4(0.19/0.2)	
	5.7	Gradeability, laden/unladen		%	5	5	5	5	
	5.10	Service brake			Electric	Electric	Electric	Electric	
Electric-engine	5.11	Parking brake			Electric	Electric	Electric	Electric	
	6.1	Drive motor rating S2 60 min		hp(kW)	10.7(8)	10.7(8)	10.7(8)	10.7(8)	
	6.2	Lift motor rating at S3 15%		hp(kW)	36.2(27)	36.2(27)	36.2(27)	36.2(27)	
	6.4	Battery voltage, nominal capacity K5 "A"		V/Ah	80/420	80/465	80/620	80/604	
	6.5	Battery weight		lb (kg)					
		Battery dimensions		l/b/h	in (mm)				
		Max. battery weight			lb (kg)				
		Min. battery weight			lb (kg)				
Misc.	8.1	Type of drive control			MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC	
	8.4	Sound pressure level at operator's ear as per EN 12053		db(A)	65	65	65	65	
	8.6	Steering			Electric	Electric	Electric	Electric	

## Technical data (Lithium)

Distinguishing mark	1.1	Manufacturer			HANGCHA GROUP CO.,LTD.				
	1.2	Manufacturer's type designation			CSDS10-XC1-NAI	CSDS12-XC1-NAI	CSDS14-XC1-NAI	CSDS16-XC1-NAI	
	1.3	Drive			Electric	Electric	Electric	Electric	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker			standing&seated	standing&seated	standing&seated	standing&seated	
	1.5	Rated capacity/rated load	Q	lb (kg)	2200(1000)	2645(1200)	3000(1361)	3500(1588)	
	1.6	Load centre distance	c	in (mm)	24(600)	24(600)	24(600)	24(600)	
	1.8	Load distance, centre of drive axle to fork	x	in (mm)	14.5(366)	14.5(366)	14.5(366)	14.5(366)	
	1.9	Wheelbase	y	in (mm)	see table 1	see table 1	see table 1	see table 1	
	1.10	Centre of drive wheel / counterweight	z	in (mm)	11(280)	11(280)	11(280)	11(280)	
Weight	2.1	Service Weight		lb (kg)	7325	7325	7425	8105	
	Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		in (mm)	Polyurethane	Polyurethane	Polyurethane	Polyurethane
		3.2	Tyre size, front			Φ14x8.1(Φ355x205)	Φ14x8.1(Φ355x205)	Φ14x8.1(Φ355x205)	Φ14x8.1(Φ355x205)
		3.3	Tyre size, rear			Φ16x6.7(Φ406x170)	Φ16x6.7(Φ406x170)	Φ16x6.7(Φ406x170)	Φ16x6.7(Φ406x170)
		3.5	Wheels, number front / rear (x = driven wheels)			2/1x	2/1x	2/1x	2/1x
		3.6	Tread, front	b10	in (mm)	50(1270)	50(1270)	50(1270)	50(1270)
Dimensions	4.2	Height, mast lowered	h1	in (mm)	127(3230)	127(3230)	131(3330)	131(3330)	
	4.4	Lift	h3	in (mm)	138(3515)	138(3515)	138(3515)	138(3515)	
	4.5	Height, mast extended	h4	in (mm)	253(6435)	253(6435)	253(6435)	253(6435)	
	4.7	Height of overhead guard (cabin)	h6	in (mm)	103(2610)	103(2610)	103(2610)	103(2610)	
	4.8	Platform Floor Height	h7	in (mm)	16(410)	16(410)	16(410)	16(410)	
	4.11	Auxiliary lift	h9	in (mm)	71(1810)	71(1810)	71(1810)	71(1810)	
	4.14	Standing height raised	h12	in (mm)	154.5(3925)	154.5(3925)	154.5(3925)	154.5(3925)	
	4.19	Overall length	l1	in (mm)	see table 1	see table 1	see table 1	see table 1	
		Length to face of forks	l2	in (mm)	see table 1	see table 1	see table 1	see table 1	
	4.21	Overall width	b1/b2	in (mm)	47.6(1210) / 58.1(1475)	47.6(1210) / 58.1(1475)	47.6(1210) / 58.1(1475)	47.6(1210) / 58.1(1475)	
	4.22	Fork dimensions	s/e/l	in (mm)	2x4.8x45.3(50x122x1150)	2x4.8x45.3(50x122x1150)	2x4.8x45.3(50x122x1150)	2x4.8x45.3(50x122x1150)	
	4.24	Fork-carriage width	b3	in (mm)	26.4(670)	26.4(670)	26.4(67		

## Mast Specification

	Total height h <sub>3</sub> + h <sub>8</sub> + s	Lift h <sub>3</sub>	Auxiliary Lift h <sub>8</sub>	Free lift h <sub>2</sub> + h <sub>8</sub>	Height mast lowered h <sub>1</sub>	Height, mast extended h <sub>4</sub>		Load capacity @600mm/24inch	
						CSDS14	CSDS16	lb/kg	lb/kg
Double full free mast	212(5375)	138(3515)	7(1810)	7(1810)	131(3330)	253(6435)	3000(1361)	3500(1588)	
	226(5740)	152(3880)	7(1810)	7(1810)	138(3510)	268(6800)	3000(1361)	3500(1588)	
	242(6144)	168(4284)	7(1810)	7(1810)	146(3715)	284(7205)	3000(1361)	3500(1588)	
	258(6548)	184(4688)	7(1810)	7(1810)	154(3915)	300(7610)	3000(1361)	3500(1588)	
	274(6952)	200(5092)	7(1810)	7(1810)	162(4120)	316(8015)	3000(1361)	3500(1588)	
	290(7356)	216(5496)	7(1810)	7(1810)	170(4320)	331(8415)	2800(1270)	3500(1588)	
	306(7760)	232(5900)	7(1810)	7(1810)	178(4520)	347(8820)	2755(1250)	3500(1588)	
	321(8164)	248(6304)	7(1810)	7(1810)	186(4725)	363(9225)	2645(1200)	3400(1540)	
	337(8568)	264(6708)	7(1810)	7(1810)	194(4925)	379(9630)	2535(1150)	3300(1495)	
	345(8770)	272(6910)	7(1810)	7(1810)	198(5025)	387(9830)	2200(1000)	3200(1450)	
Triplex full free mast	279(7090)	206(5230)	7(1810)	140(3560)	138(3308)	321(8150)	3000(1361)	3500(1588)	
	303(7700)	230(5840)	7(1810)	148(3770)	138(3510)	345(8760)	2755(1250)	3500(1588)	
	327(8310)	254(6450)	7(1810)	156(3975)	146(3715)	369(9370)	2645(1200)	3400(1540)	
	351(8920)	278(7060)	7(1810)	165(4180)	154(3915)	393(9980)	2200(1000)	3200(1450)	
	375(9530)	302(7670)	7(1810)	173(4385)	162(4120)	417(10590)	1875(850)	3000(1361)	
	399(10140)	326(8280)	7(1810)	181(4590)	170(4320)	441(11200)	1320(600)	2800(1270)	
	423(10750)	350(8890)	7(1810)	189(4800)	178(4520)	465(11810)	1100(500)	2600(1180)	
	447(11360)	374(9500)	7(1810)	197(5005)	186(4725)	489(12420)	-	2400(1090)	
	471(11970)	398(10110)	7(1810)	205(5210)	194(4925)	513(13030)	-	2250(1020)	
	483(12275)	410(10415)	7(1810)	209(5315)	198(5025)	525(13335)	-	2050(930)	

## Mast Specification

	Total height h <sub>3</sub> + h <sub>8</sub> + s	Lift h <sub>3</sub>	Auxiliary Lift h <sub>8</sub>	Free lift h <sub>2</sub> + h <sub>8</sub>	Height mast lowered h <sub>1</sub>	Height, mast extended h <sub>4</sub>		Load capacity @600mm/24inch	
						CSDS10	CSDS12	lb/kg	lb/kg
Double full free mast	212(5375)	138(3515)	7(1810)	7(1810)	127(3230)	253(6435)	2200(1000)	2645(1200)	
	226(5740)	152(3880)	7(1810)	7(1810)	134(3410)	268(6800)	2200(1000)	2645(1200)	
	242(6144)	168(4284)	7(1810)	7(1810)	142(3610)	284(7205)	2200(1000)	2645(1200)	
	258(6548)	184(4688)	7(1810)	7(1810)	150(3815)	300(7610)	2200(1000)	2645(1200)	
	274(6952)	200(5092)	7(1810)	7(1810)	158(4015)	316(8015)	2200(1000)	2645(1200)	
	290(7356)	216(5496)	7(1810)	7(1810)	166(4215)	331(8415)	2200(1000)	2645(1200)	
	297(7558)	232(5698)	7(1810)	7(1810)	170(4320)	339(8620)	2200(1000)	2645(1200)	
	303(7700)	230(5840)	7(1810)	148(3770)	134(3410)	345(8760)	2200(1000)	2645(1200)	
	327(8310)	254(6450)	7(1810)	156(3975)	142(3610)	369(9370)	2200(1000)	2645(1200)	
	351(8920)	278(7060)	7(1810)	165(4180)	150(3815)	393(9980)	2200(1000)	2200(1000)	
Triplex full free mast	375(9530)	302(7670)	7(1810)	173(4385)	158(4015)	417(10590)	1875(850)	1875(850)	
	399(10140)	326(8280)	7(1810)	181(4590)	166(4215)	441(11200)	1320(600)	1320(600)	
	423(10445)	338(8585)	7(1810)	185(4700)	170(4320)	465(11810)	1100(500)	1100(500)	

Table 1

Battery and compartment size			1.0t	1.0/1.2/1.4t	1.4/1.6t	1.6t	1.0/1.2t	1.0/1.2/1.4	1.6t	1.6t
6.4	Battery Voltage	V	80	80	80	80	80.5	80.5	80.5	80.5
	Battery Type		Lead-acid	Lead-acid	Lead-acid	Lead-acid	Lithium	Lithium	Lithium	Lithium
	Battery capacity maximum 5 Hr Rate	Ah	420	465	620	930	346	604	604	906
6.5	Battery Compartment	"X" Max.	in(mm)	40.5(1028)	40.5(1028)	40.5(1028)	40.5(1028)	40.5(1028)	40.5(1028)	40.5(1028)
		"Y" Max.	in(mm)	24.1(611)	24.1(611)	28(711)	39.3(999)	16(407)	24.1(611)	24.1(611)
		"Z" Max.	in(mm)	30.4(772)	30.4(772)	30.4(772)	30.4(772)	28.8(732)	28.8(732)	32.68(830)
1.9	Minimum Batt.Wt.	lb(kg)	2407(1092)	2458(1159)	3245(1472)	4504(2043)	1069(485)	1069(485)	1069(485)	1323(600)
	Maximum Batt.Wt.	lb(kg)	2663(1208)	2824(1281)	3587(1627)	4978(2258)	1135(515)	1135(515)	1135(515)	1411(640)
4.19	Wheelbase	y (in\mm)	77.9(1978)	77.9(1978)	81.8(2078)	93(2366)	77.9(1978)	77.9(1978)	81.8(2078)	87.5(2223)
4.20	Overall length	l <sub>1</sub> (in\mm)	142.5(3620)	142.5(3620)	146.5(3720)	157.8(4008)	142.5(3620)	142.5(3620)	146.5(3720)	152.2(3865)
4.35	Length to face of forks	l <sub>2</sub> (in\mm)	136.1(3456)	136.1(3456)	140(3556)	151.3(3844)	136.1(3456)	136.1(3456)	140(3556)	145.7(3701)
Wa (in\mm)		80.9(2258)	80.9(2258)	92.8(2358)	104.2(2646)	80.9(2258)	80.9(2258)	92.8(2358)	98.5(2503)	

