

**POWERFUL
EFFICIENT
RELIABLE**



Hangcha Europe GmbH

Mariechen-Graulich-Straße 12a,
65439 Flörsheim am Main,
Germany

Administration

Tel: 0049-61453769188
E-mail: admin@hangchaeurope.com

Sales Management

Thomas Dittrich
Mob: 0049-16096548808
E-mail: thomas.dittrich@hangchaeurope.com

Technical Support

Thomas Pannke
Mob: 0049-01759284213
E-mail: thomas.pannke@hangchaeurope.com

www.hangchaeurope.com




Follow us on
Facebook



Follow us on
YouTube



Follow us on
WeChat



Download "Hangcha
Forklift" App



ISO45001:2018



ISO14001:2015



ISO9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

2024 VERSION 4/COPYRIGHT 2024/09

XH SERIES HEAVY-DUTY HIGH-VOLTAGE LITHIUM BATTERY FORKLIFT

with capacity of 4,000 to 5,000kg



The World of Hangcha



XH SERIES HEAVY-DUTY HIGH-VOLTAGE LITHIUM BATTERY FORKLIFT

The XH series heavy-duty high-voltage lithium battery special forklift inherits the advantages of the XH heavy-duty series and adopts the CATL standard box. This tonnage industry is the one that uses a dual-water cooling system for the motor and battery. It has super heat dissipation performance and can meet 24h non-stop operation. It is very suitable for various high-temperature environments such as ship cabins and other airtight and high-temperature environments (even the operating environment temperature can reach 50°C), heavy attachments such as paper roll clamps, and operations in front of smelting furnaces.

VOLTAGE

348V

100% CHARGE FOR

1 Hour

WATER RESISTANCE

IPX4

Stylish appearance

/ With the inherited classic exterior design of the dedicated XC lithium battery forklift and a smooth and sturdy profile, the whole vehicle is compact, elegant, stylish and sturdy.

THE *Plus*
FOR YOUR
BUSINESS



FASTER & MORE EFFICIENCY.

Compared with low-voltage lithium battery forklifts, high-voltage lithium battery technology can save about 40% of the overall cost during the service cycle.

40%

Low Voltage Lithium
Battery Forklift

Hangcha High Voltage
Lithium Electric Forklift



Compared with fuel forklifts, high-voltage lithium battery technology can save about 90% of the overall cost during the service cycle.

90%

Fuel Forklift

Lithium Electric Forklift



POWER PERFORMANCE COMPARISON

| | High Voltage Lithium Electric Forklift | Fuel Forklift |
|---|--|---------------|
| Travel speed, laden/unladen | 24/25km/h | 23/25km/h |
| Lift speed, laden/unladen | 460/520mm/s | 380/410mm/s |
| Max. gradeability, S2-5min, laden/unladen | 25/23% | 15%-25% |

LI-ION
TECHNOLOGY

6 YEARS
WARRANTY

HANGCHA provides Li-ion battery (LiFePO4) with 6 years or 12000 hours warranty.

Through disruptive battery and fast charging technology, the charging time is greatly shortened.

Get the battery fully charge:



Fast charging makes it possible for the whole vehicle to work continuously, shortening the waiting time and greatly improving efficiency.

Battery capacity

| | |
|---------|-----------------------|
| 43.3Kwh | XC Series 4.0-5.0t |
| 60.2Kwh | XH Series 4.0-5.0t |

Hangcha High Voltage
Electric Forklift

Electric Forklift

STRONG ADAPTABILITY



Both the drive and operating systems are vehicle-grade permanent magnet synchronization systems. Equipped with a high speed ratio gearbox, the driving speed, lifting speed, upslope degree and acceleration performance surpass that of internal combustion vehicles.



The drive axle, steering axle and tires of internal combustion forklifts can meet the demand of high-intensity operating conditions of internal combustion forklifts.



It meets all-weather operating conditions and is usable under severe operating conditions such as cold storage, heavy rains and waterlogged roads.



EFFICIENT AND DURABLE

Ultra-long battery life

- / With a 348V high-voltage platform and vehicle-grade permanent magnet synchronization system, the vehicle boasts of a smaller current, very low heat loss and more energy-efficient;
- / The vehicle uses an overall controller to control the traction motor controller assembly to form a highly independent, user-friendly and intelligent drive system.
- / Standard large-capacity lithium battery, 40% larger than that of ordinary low-voltage 80V/542Ah lithium battery, meets long battery life requirements;

Super charging



The standard IC super-fast charging technology allows the water cooling system to work during charging and high current charging, thus only 1h is required for fully charging;



Optional 0.5C charger (fully charged in 2h), economical and convenient.

SAFE AND RELIABLE

The cover of the vehicle is designed to be sealed to the water resistance level of IPX4 for the body. All the motor, electronic controls and high-voltage components reach the dust and water resistance level of IP67, a high protection level adequate to withstand harsh operating environments and ensure safety and reliability.



The electrical system is equipped with high-voltage interlocks, insulation detection, offering vehicle-grade safety measures. The MSD maintenance switch enables one-click power-down and safer maintenance;



All CATL lithium batteries are equipped with standard automatic battery fire extinguishing devices, allowing higher safety in use.

The steering axle with standard configuration of turning and deceleration functions reduces the overturning risk effectively.



DUAL WATER COOLING SYSTEMS




It is the first time that the motor-battery dual water cooling systems and full suspension damping system are used on new energy forklifts, which can be fully applicable to various severe operating conditions such as high temperature and strong load.



The water cooling system keeps the battery at the best working temperature of about **30 °C**, with high efficiency, slow decay and long life.




The **large ventilation opening** designed for internal combustion forklifts allows better heat dissipation of the battery and the motor.

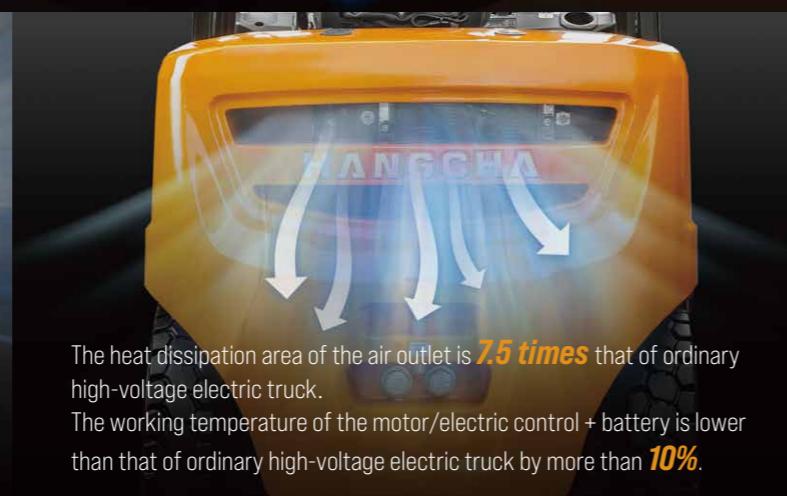

The heat dissipation area of the air outlet is **7.5 times** that of ordinary high-voltage electric truck. The working temperature of the motor/electric control + battery is lower than that of ordinary high-voltage electric truck by more than **10%**.

The mast integrated large volume hydraulic oil tank boasts of good hydraulic heat dissipation and low oil temperature, further ensuring long-term and reliable operation of hydraulic parts and prolonging service life.

The volume of the hydraulic oil tank and the heat dissipation area are 2.5 times that of ordinary high-voltage electric truck. The hydraulic oil temperature is lowered by more than 20% compared with ordinary high-voltage electric truck.

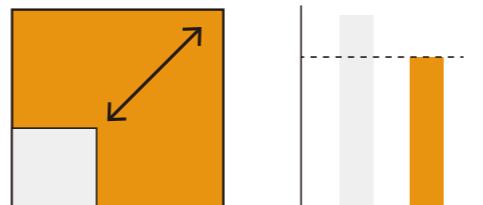

CONVENIENT MAINTENANCE

- / The vehicle with ergonomic design, a wide view and a large operating space makes it easier for drivers to operate;
- / The multi-functional color screen instrument is designed to have graphic interfaces; three SPE speed gears are selectable to adapt to different operating conditions; interfaces can be switched between English and Chinese to meet the demands of customers at home and abroad;
- / Reasonable arrangement of battery and motor radiator allows more convenient liquid replenishment and maintenance;
- / The water tank cover and the left and right side plates of the hood can be dismounted without a tool, so that the operable surface is large during cleaning and maintenance, convenient and fast.



Large-capacity lithium battery,
long battery life on one charge



Multi-functional color screen instrument

Standard Specification

- / Multi-function color-screen combination instrument
- / Standard duplex mast, fork, fork carriage and load backrest
- / Stamped iron hood, stamped iron side plates
- / Stamped stainless steel boarding step
- / The gas spring of the hood with a touch-proof mechanism
- / Handbrake with a touch-proof mechanism
- / Integrated fuse box
- / Charging muzzle meeting national standards
- / Reverse buzzer
- / Maintenance-free 12V lead acid battery
- / Two-in-one permanent magnet AC traction motor controller
- / Two-in-one permanent magnet AC oil pump motor controller
- / Power DC-DC two-in-one
- / VCU controller
- / MSD maintenance switch
- / Emergency power off switch
- / Mileage display, operating time display
- / Load sensing steering system
- / Turning deceleration function
- / Fork descending buffering
- / SPE power selection
- / Electronic water pump
- / Electronic fan
- / Heat dissipater
- / Expansion tank
- / Load-sensitive multiway valve
- / Silent gear pump
- / Traction pin
- / Hangcha cloud intelligent management system
- / Standard box of lithium battery
- / Standard box of lithium battery with low temperature electric heating systems
- / Standard box of lithium battery with battery heat management systems
- / LED combination headlights, LED rear combination three-color taillights



Options

- / Coloring solid environmentally friendly seamless tire
- / Solid tire
- / Left and right rear view mirrors
- / Reversing video
- / Front/Rear blue light
- / Rear LED operation light
- / Dedicated lithium battery charger
- / Cold storage vehicle
- / Right rear armrest with horn button
- / OPS seat sensing function
- / Triple multi-way valve
- / Quadruple multi-way valve
- / Quintuple multi-way valve
- / Heightened load backrest
- / Widened fork carriage
- / Forks of other lengths
- / Free duplex mast
- / Free triplex mast
- / Built-in side mast
- / Accessories for other specifications
- / Fully-suspended seat
- / Seat heating function
- / Start with a PIN code or by swiping a card
- / Double front wheels
- / Cab
- / Lockable hood
- / Fire extinguisher
- / High and low overhead guards
- / Alarm light
- / Integrated multifunctional fingertip control system including ergonomic armrests
- / Toolbox, folder

4.0-4.5t Mast Specification

| Type | Model | Max. Fork Height | Lowered | Overall height | | Free lift | | Tilt range | | Capacity | | | |
|------------|-----------|------------------|---------|------------------|----------|---------------|----------|------------------|------|----------|------|------------------------|-------------|
| | | | | Without backrest | | With backrest | | Without backrest | | F | R | load capacity at 500mm | |
| | | | | 4.0/4.5t | 4.0/4.5t | 4.0/4.5t | 4.0/4.5t | 4.0t | 4.5t | 4.0t | 4.5t | Single tire | Double tire |
| STD Duplex | XHP45M250 | 2500 | 1995 | 3330 | 3670 | 160 | 160 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M270 | 2700 | 2095 | 3530 | 3870 | 160 | 160 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M300 | 3000 | 2245 | 3830 | 4170 | 160 | 160 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M330 | 3300 | 2395 | 4130 | 4470 | 160 | 160 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M350 | 3500 | 2495 | 4330 | 4670 | 160 | 160 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M360 | 3600 | 2545 | 4430 | 4770 | 160 | 160 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M370 | 3700 | 2595 | 4530 | 4870 | 160 | 160 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M380 | 3800 | 2645 | 4645 | 4970 | 160 | 160 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M400 | 4000 | 2795 | 4945 | 5170 | 160 | 160 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M430 | 4300 | 2960 | 5210 | 5470 | 160 | 160 | 6 | 6 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M450 | 4500 | 3070 | 5420 | 5670 | 160 | 160 | 6 | 6 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M480 | 4800 | 3235 | 5635 | 5970 | 160 | 160 | 6 | 6 | 4000 | 4500 | 4000 | 4500 |
| | XHP45M500 | 5000 | 3345 | 5845 | 6170 | 160 | 160 | 6 | 6 | 4000 | 4450 | 4000 | 4400 |
| | XHP45M550 | 5500 | 3620 | 6370 | 6670 | 160 | 160 | 3 | 6 | 3700 | 4000 | 4000 | 4200 |
| | XHP45M600 | 6000 | 3895 | 6895 | 7170 | 160 | 160 | 3 | 6 | 3600 | 3600 | 3700 | 3800 |
| | XHP45U250 | 2500 | 1976 | 3330 | 3670 | 1146 | 806 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45U275 | 2750 | 2100 | 3580 | 3920 | 1270 | 930 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45U300 | 3000 | 2226 | 3830 | 4170 | 1396 | 1056 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45U330 | 3300 | 2376 | 4130 | 4470 | 1546 | 1206 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45U350 | 3500 | 2476 | 4330 | 4670 | 1646 | 1306 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45U360 | 3600 | 2526 | 4430 | 4770 | 1696 | 1356 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| | XHP45U370 | 3700 | 2576 | 4530 | 4870 | 1746 | 1406 | 6 | 12 | 4000 | 4500 | 4000 | 4500 |
| Triple | XHP45N400 | 4000 | 2080 | 4850 | 5170 | 1229 | 912 | 6 | 6 | 4000 | 4500 | 4000 | 4500 |
| | XHP45N430 | 4300 | 2180 | 5150 | 5470 | 1329 | 1012 | 6 | 6 | 4000 | 4500 | 4000 | 4500 |
| | XHP45N450 | 4500 | 2248 | 5350 | 5670 | 1395 | 1080 | 6 | 6 | 4000 | 4400 | 4000 | 4500 |
| | XHP45N470 | 4700 | 2310 | 5550 | 5870 | 1459 | 1142 | 6 | 6 | 4000 | 4300 | 4000 | 4400 |
| | XHP45N480 | 4800 | 2340 | 5650 | 5970 | 1489 | 1172 | 6 | 6 | 4000 | 4300 | 4000 | 4400 |
| | XHP45N500 | 5000 | 2410 | 5850 | 6170 | 1559 | 1242 | 6 | 6 | 3800 | 4250 | 4000 | 4300 |
| | XHP45N550 | 5500 | 2575 | 6350 | 6670 | 1724 | 1408 | 3 | 6 | 3700 | 4200 | 4000 | 4250 |
| | XHP45N600 | 6000 | 2790 | 6850 | 7180 | 1939 | 1622 | 3 | 6 | 3600 | 3800 | 3700 | 4000 |
| | XHP45N650 | 6500 | 2980 | 7350 | 7670 | 2129 | 1812 | 3 | 6 | 3400 | 3600 | 3600 | 3800 |
| | XHP45N700 | 7000 | 3155 | 7850 | 8170 | 2304 | 1988 | 3 | 6 | 3000 | 3200 | 3400 | 3400 |

With sideshifter minus 200kg, with integrated sideshifter minus 100kg.

mini5.0-5.0t Mast Specification

| Type | Model | Max. Fork Height | Lowered | Overall height | | Free lift | | Tilt range | | Capacity | | | | | | |
|------------|------------|------------------|---------|------------------|------|---------------|------|------------------|------|----------|------|------------------------|------------------------|--------|------|------|
| | | | | Without backrest | | With backrest | | Without backrest | | F | R | load capacity at 500mm | load capacity at 600mm | | | |
| | | | | min5.0t | 5.0t | min5.0t | 5.0t | min5.0t | 5.0t | min5.0t | 5.0t | kg | kg | | | |
| STD Duplex | XHPX50M250 | 2500 | 1995 | 3245 | 3325 | 3600 | 3865 | 3895 | 160 | 170 | 170 | 6 | 12 | 5000 | 5000 | |
| | XHPX50M270 | 2700 | 2095 | 3245 | 3525 | 3800 | 4065 | 4095 | 160 | 170 | 160 | 6 | 12 | 5000 | 5000 | |
| | XHPX50M300 | 3000 | 2245 | 3425 | 4100 | 4365 | 4395 | 160 | 170 | 160 | 170 | 6 | 12 | 5000 | 5000 | |
| | XHPX50M330 | 3300 | 2395 | 3645 | 4125 | 4400 | 4665 | 4695 | 160 | 170 | 160 | 170 | 6 | 12 | 5000 | 5000 |
| | XHPX50M350 | 3500 | 2495 | 3745 | 425 | 4600 | 4865 | 4985 | 160 | 170 | 160 | 170 | 6 | 12</td | | |