

Features

Truck	Standard	Options
48V permanent magnet synchronous drive motor	●	
Hydraulic power unit	●	
PU drive wheel	●	
1150mm fork length	●	
570mm outside fork width	●	
Lifting height limit: 1.8m	●	
Soft landing (only available for duplex mast)	●	
48V/80Ah lithium battery[EVE]	●	
Balance wheels	●	
Double load wheels	●	
Fork lift & lower adopts stepless speed regulating	●	
Different length of forks		○
Different width of outside fork		○
Different mast lifting heights		○
48V/105Ah lithium battery (EVE)		○
48V/125Ah lithium battery (CATL)		○
Load backrest		○
Controls and instruments		
Interactive meter	●	
Multi- function tiller	●	
PIN code access	●	
USB power supply	●	
Key switch		○
Electric steering(stand-on type)	●	
Systech controller	●	
Safety		
Emergency disconnect switch	●	
Turning deceleration(stand-on type)	●	
Mast protection		○
Horn	●	
Other		
48V30A charger		○
48V50A charger		○
Lithium battery(48V/80Ah,EVE) with the on-board charger(48V,20A)		○
Lithium battery(48V/105Ah,EVE) with the on-board charger(48V,20A)		○



Hangcha Europe GmbH

Mariechen-Graulich-Straße 12a,
65439 Flörsheim am Main,
Germany

Administration
Tel: 0049-61453769188
E-mail: admin@hangchaeurope.com

Sales Management
Thomas Dittrich
Mob: 0049-16096548808
E-mail:thomas.dittrich@hangchaeurope.com

Technical Support
Thomas Pannke
Mob: 0049-01759284213
E-mail: thomas.pannke@hangchaeurope.com

www.hangchaeurope.com



Folgen Sie uns auf
Instagram



Folgen Sie uns auf
Facebook



Folgen Sie uns auf
YouTube



"Hangcha Forklift"
App herunterladen



HANGCHA Group Co., LTD behält sich das Recht vor, Änderungen bezgl. Farbe, Spezifikationen, Ausstattung und sonstige Details, dierer Broschüre ohne Vorankündigung vorzunehmen. Fahrzeugfarben können von den Farben in dieser Brochure abweichen.



X SERIES

HI-RANGE ELECTRIC STACKER
WITH LITHIUM POWER

With capacity of 1,200 to 2,000kg

X SERIES HI-RANGE ELECTRIC STACKER


X series Hi-Range Electric stackers are a new generation of products newly developed by Hangcha for warehousing and logistics applications. Using the advanced permanent magnet brushless drive technology and equipped with a new 48V system, the products have advanced performance, comfortable, safe and reliable operations and low use and maintenance costs, and are ideal tools for loading, unloading and handling palletized goods in warehouses, supermarkets and workshops.

48V

V O L T A G E

WITH

PERMANENT MAGNET
SYNCHRONOUS DRIVE MOTOR

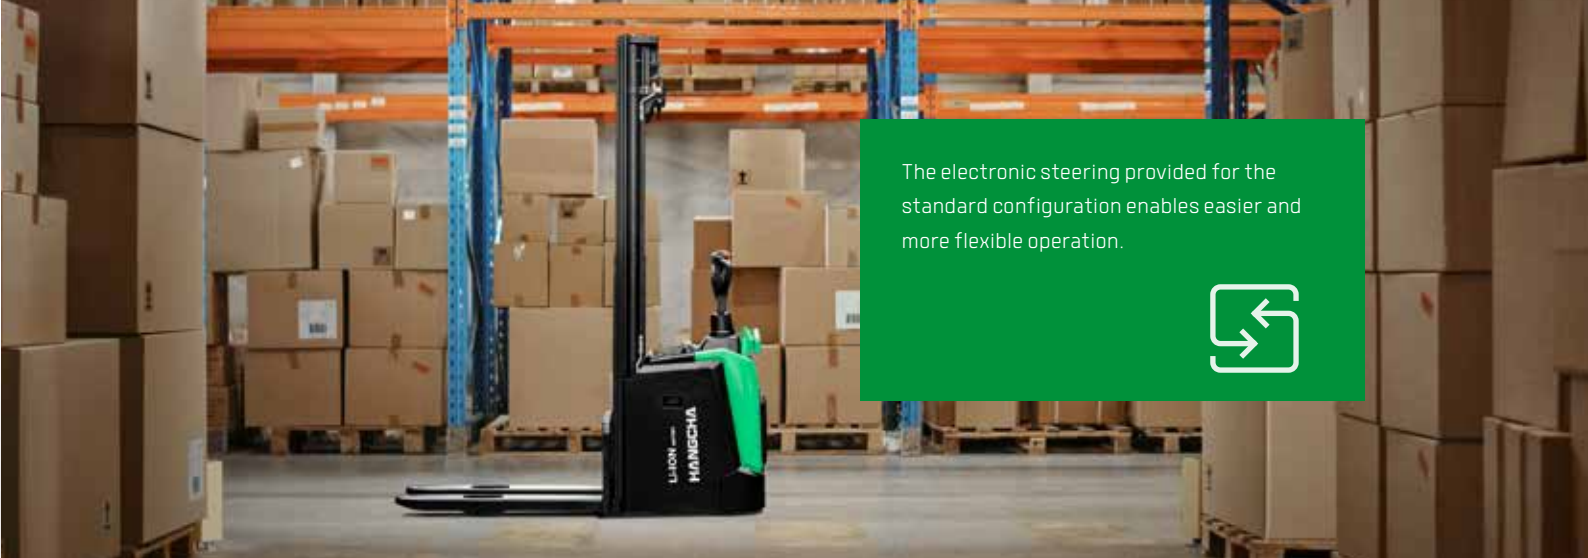

The electronic steering provided for the standard configuration enables easier and more flexible operation.




HIGH PERFORMANCE

- With high power drive motor, provides fast travel speed and good gradeability.
- The permanent magnet synchronous drive system has excellent performance and low energy consumption. The 48V power supply system has less heat generated.
- With the VCU control, the vehicle can be controlled accurately, stably and more efficiently.



(Option)Lithium battery with the on-board charger(48V,20A)


Pedestrian type



6.0

km/h

Travel speed (laden)




8.0

%

Gradeability (laden)(1.6t)


Stand-on type



9.0

km/h

Travel speed (laden)



10

%

Gradeability (laden)(1.6t)

RUGGED ON THE OUTSIDE.

The X series Hi-Range Electric stackers adopts a professional industrial design of exterior and a series family design. The vehicle has a smooth vivid profile and a fully ergonomic design, following the latest exterior design trend.

Made of high-strength steel plates that are molded by stamping, the vehicle exterior is robust, durable and high-grade, and meets environmental protection requirements.



SIMPLE OPERATION

System Stepless lifting and descending speed regulation is provided for the standard configuration, to and spillage more precise fork control and more stable goods lifting and descending.



ENJOY YOUR WORK.

- Optimized designing structure to offer a good visibility and easy entrance of the pallet.
- The compact body and big rounded design provide an ideal operation in limited space, and the wedge designed chassis greatly increases the passing ability.



The standing driving pedal with shock-absorbing design significantly improves standing driving comfort and reduces long-time driving fatigue.



Customer can choose different width of outside fork and length of forks to fit variable pallet.

NEW TILLER

With the novelly developed compact and stylish tiller, all operations can be completed with one hand.



PIN code access

Displayed turtle speed function applied to move slowly and helps to stack goods in narrow spaces.



MAINTENANCE

- Maintenance-free permanent magnet synchronous motor.
- The fault information can be checked directly via the interactive instruments instead of the manual.
- Rear cover can be completely open, operator can see all the components,so the maintenance is very convenient.
- All shafts installed lubricated shaft sleeve and oil cup, provide convenient maintenance and long service life.



MORE PROTECT

- With the four-point low center of gravity design and a high-strength steel frame structure, the vehicle frame has a large residual load capacity and a long service life.
- Using non-contact proximity switch, it can provides long life and reliable operation .
- H-type mast profile section to provide more stable and rigid performance.
- The battery is reliably fixed and the battery cover is Support by soft materials, so that the vibration and noise generated during the operation of the vehicle are reduced.



Pedestrian type use the new design drive system, the drive motor will not accompany the tiller rotation, it can keep all the cable connect to the drive motor avoid being bent.



With a low noise and low vibration hydraulic power unit to enable stable and reliable lifting and descending.



The power plug is fixed on the truck body to avoid damage from battery installment.



Punch-formed forks to provide more strength and tip guide to provide higher efficient operation.



Water-proof plugs and connectors applied to provide a reliable protection to electric system.

With three braking types:

Releasing brake, reversing brake and emergency brake, the driving safety has been ensured.



The applied slope anti-slip function ensures the safety of the operation.



The emergency button on the tiller head can effectively avoid the harm to the driver.



ADVANCED SAFETY FEATURES

1



After fork lifting 500mm.



2



Decrease speed when turning



3



Soft Landing (Lift)




4



Soft Landing (Lowering)



5



1 Travel speed will be automatically reduced after fork lifting 500mm.

2 Turning speed is automatically reduced when steering only for stand-on.

3 A lifting soft landing is provided for the standard configuration so as to ensure the safety of the vehicle when the fork is lifted to the top. (only available for duplex mast)

4 It has an intelligent soft landing that automatically slows down the lowering speed when the fork is less than 100mm above the ground, effectively protecting cargo safety. (only available for duplex mast)

5 For the standard configuration, a function of stopping lifting when the lifting height reaches the limit of 1.8m and resuming the lifting after the guardrails are retracted is provided to facilitate personnel to escape when high-position goods fall.



LI-ION
TECHNOLOGY

HANGCHA provides Li-ion battery (LiFePO4) with 6 years or 12000 hours warranty.

6 YEARS
WARRANTY

LITHIUM POWERED

EMPOWER YOURSELF WITH THE BEST



Li
Lithium

POWER THE POSSIBILITIES
RELIABLE LITHIUM-ION TECHNOLOGY

LITHIUM BATTERY ADVANTAGES



Long service life

4000 full charging cycles with at least 75% residual capacity.



Return on investment

Add flexibility to your operation, cost-saving in the long term, increased efficiencies.



Maintenance free

No topping up of water or checking acid levels.



High energy density

The high energy density of the Li-Ion battery ensures long working times and increases the high availability.



Cold area application

Li-Ion batteries maintain high performance at temperatures below freezing.



High safety and reliability

Intelligent battery management monitoring every important function, no emission of battery gasses.




Opportunity charging

Full performance during several shifts thanks to effective interim charging.

FEATURES & BENEFITS THE HANGCHA DIFFERENCE


Efficiency

By quick opportunity charging any downtime, such as a lunch break, can be efficiently used and the battery is recharged in a very short period of time. Interim charging does not affect the battery service life.

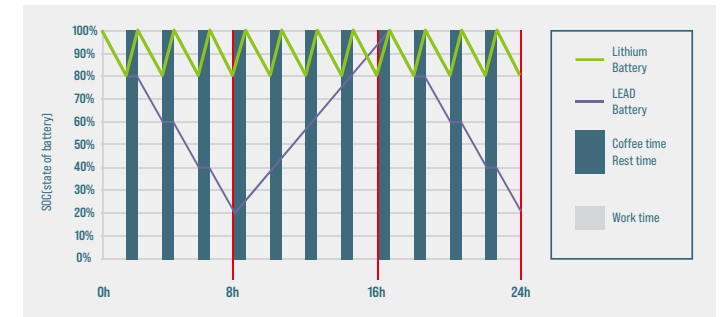

Safety

- / Intelligent battery management monitoring every important function.
- / Higher user safety, thanks to acid-free use.
- / User friendly due to avoided battery change.
- / No emission of battery gasses.

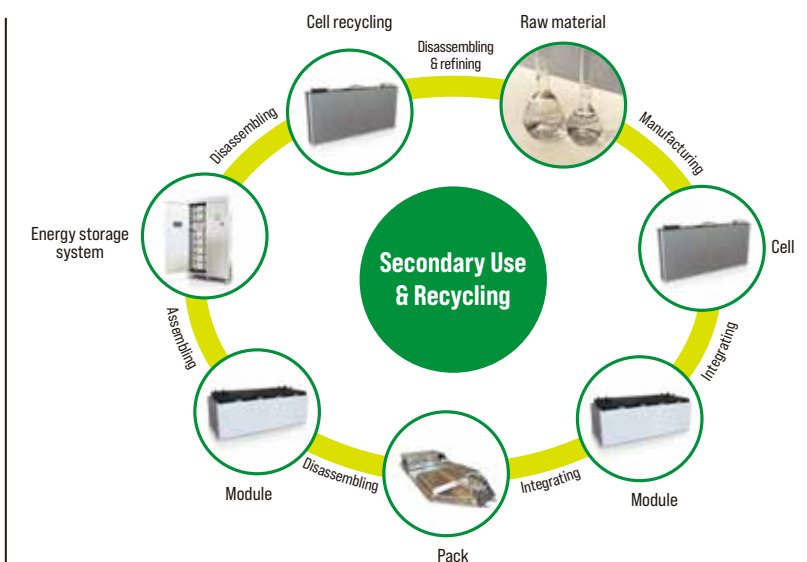

QUESTION 1

Q: What are the characteristics of lithium batteries, especially when used in high and low temperature environments?

Charging temperature: -30 C -65 C
Discharge temperature: -30 C -65 C
Storage environment temperature: -30 C -65 C

After the truck key switch is closed, the instrument battery condition needs to be checked:

1. Confirm that there is no battery system alarm message on the instrument panel.
2. Please check the remaining power before use. It is recommended to use the SOC between 50% and 100%.
3. If the SOC is lower than 20%, it is not recommended to continue using it. Please charge it as soon as possible.

QUESTION 2

Q: What is the charging time and usage time calculation of forklift lithium battery?

1. Available power of lithium battery (kWh) = rated voltage * rated power * 90% (To avoid over-discharge damaging the battery, the forklift is equipped with low power protection (less than 10%)).
 2. Charging time (h) = rated capacity of lithium battery (Ah) * 90% * charger output current (A).
 3. The power consumed for charging (kWh) = the available power of the lithium battery * 93% (the charging efficiency of the charger is calculated as 93%).
 4. Usage time (h) = available power of lithium battery * energy consumption data.
- For specific energy consumption values, please refer to the technical table on the sharing platform.**

QUESTION 3

Q: How does Hangcha BMS work to ensure the safety of the lithium battery?

HANGCHA BMS (battery management system) can monitor the cells at all times. As a result, hangcha lithium power is the reliable solution.



Battery Safety Management:

Overcharge / over discharge protection
Overcurrent / over-temperature / low-temperature protection
Multi-level fault diagnosis protection
Double fault monitoring



Battery Parameter Detection:

Battery voltage detection and analysis
Battery current detection and analysis
Battery temperature detection and analysis



Equilibrium Management:

Equalization based on voltage mode
Equalization based on time mode
Equalization based on battery cell SOC
Active / passive equalization optional



Other Features:

Low cost, low power consumption
Historical data record
Flexible cascade expansion
CRC data validation

1.2t Mast Specification

Type	Max. lifting height h3	Ground clearance, fork (h3+h13)	Lowered height h1	Extended height h4	Free lift
Double cylinder duplex wide view	mm	mm	mm	mm	mm
	2100 ¹⁾	2190	1540	2590	90
	2500 ¹⁾	2590	1740	2990	90
	2700	2790	1840	3190	90
	3000	3090	1990	3490	90
	3200	3290	2090	3690	90
	3400	3490	2190	3890	90
Duplex full-free wide view	mm	mm	mm	mm	mm
	2100 ¹⁾	2190	1540	2590	1070
	2500 ¹⁾	2590	1740	2990	1270
	2700	2790	1840	3190	1370
	3000	3090	1990	3490	1520
	3200	3290	2090	3690	1620
	3400	3490	2190	3890	1720
Triplex full-free wide view	mm	mm	mm	mm	mm
	3600	3690	2290	4090	1820
	3600 ¹⁾	3690	1660	4080	1195
	3900 ¹⁾	3990	1760	4380	1295
	4100 ¹⁾	4190	1830	4580	1360
	4300	4390	1890	4780	1425
	4500	4590	1960	4980	1495
	4700	4790	2030	5180	1560

Note: 1) Optional feature for battery side roll out was necessary, It can make changing the battery easier

1.4-1.6t Mast Specification

Type	Max. lifting height h3	Ground clearance, fork (h3+h13)	Lowered height h1	Extended height h4	Free lift
Double cylinder duplex wide view	mm	mm	mm	mm	mm
	2000 ¹⁾	2090	1540	2540	90
	2400 ¹⁾	2490	1740	2940	90
	2700	2790	1890	3240	90
	2900	2990	1990	3440	90
	3000	3090	2040	3540	90
	3300	3390	2190	3840	90
	3500	3590	2290	4040	90
	3800	3890	2440	4340	90
	4000	4090	2540	4540	90
	4200	4290	2640	4740	90
	4500	4590	2790	5040	90
	2000 ¹⁾	2090	1540	2540	1020
Duplex full-free wide view	mm	mm	mm	mm	mm
	2400 ¹⁾	2490	1740	2940	1220
	2700	2790	1890	3240	1370
	3000	3090	2040	3540	1520
	3300	3390	2190	3840	1670
	3500	3590	2290	4040	1770
	3800 ¹⁾	3890	2440	4340	1820
Triplex full-free wide view	mm	mm	mm	mm	mm
	4000 ¹⁾	4090	1830	4520	1330
	4200	4290	1890	4720	1390
	4500	4590	2030	5020	1490
	4700	4790	2090	5220	1560
	4800	4890	2090	5320	1590
	5000	5090	2160	5520	1660
	5200	5290	2230	5720	1730
	5500	5590	2330	6020	1830
	6000	6090	2500	6520	2000


Note: 1) Optional feature for battery side roll out was necessary, It can make changing the battery easier

2.0t Mast Specification

Type	Max. lifting height h3	Ground clearance, fork (h3+h13)	Lowered height h1	Extended height h4	Free lift
Double cylinder duplex wide view	mm	mm	mm	mm	mm
	2050 ¹⁾	2140	1660	2690	90
	2250 ¹⁾	2340	1760	2890	90
	2400 ¹⁾	2490	1830	3030	90
	2700	2790	1990	3340	90
	3000	3090	2140	3640	90
	3200	3290	2240	3840	90
	3400	3490	2340	4040	90
	3600	3690	2440	4240	90
	3800	3890	2540	4440	90
Duplex full-free wide view	mm	mm	mm	mm	mm
	4000	4090	2640	4640	90
	4300	4390	2850	5000	90
	4500	4590	2950	5200	90
	2050 ¹⁾	2140	1660	2690	1020
	2250 ¹⁾	2340	1760	2890	1120
	2400 ¹⁾	2490	1830	3030	1200
Triplex full-free wide view	mm	mm	mm	mm	mm
	2700	2790	1990	3340	1350
	3000	3090	2140	3640	1500
	3200	3290	2240	3840	1300
	3400	3490	2340	4040	1700
	3600	3690	2440	4240	1800
	3500 ¹⁾	3590	1800	4150	1165
	3800	3890	1900	4450	1280
	4000	4090	1965	4650	1300
	4200	4290	2030	4850	1395
	4500	4590	2130	5150	1495
	4800	4890	2230	5450	1595
	5000	5090	2330	5650	1660
	5500	5590	2485	6150	1830
	6000	6090	2640	6650	2000


Note: 1) Optional feature for battery side roll out was necessary, It can make changing the battery easier

Rated Capacities and Load Centres Graph




1.2t

Rated Capacities and Load Centres Graph




1.4t



1.6t

Rated Capacities and Load Centres Graph



2.0t

Technical data

Distinguishing mark	1.1	Manufacturer (abbreviation)		HANGCHA GROUP CO.,LTD.			
	1.2	Manufacturer's type designation		CDD12-XT1S-SI	CDD14-XT1S-SI	CDD16-XT1S-SI	CDD20-XT1S-SI
	1.3	Drive: electric (battery type, mains, ...), diesel, petrol, fuel gas		Electric	Electric	Electric	Electric
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Standing	Standing	Standing	Standing
Weight	1.5	Rated capacity /rated load	kg	1200	1400	1600	2000
	1.6	Load centre distance	c (mm)	600	600	600	600
	1.8	Load distance, centre of drive axle to fork	x (mm)	700	700	700	700
	1.9	Wheelbase	y (mm)	1296	1331	1331	1331
Tyres, chassis	2.1	Service weight	kg	1200	1220	1230	1260
	2.2	Axle loading, laden front/rear	kg	876/1524	956/1664	1033/1797	1190/2070
	2.3	Axle loading, unladen front/rear	kg	840/360	854/366	861/369	882/378
	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		PU	PU	PU	PU
Dimensions	3.2	Tyre size, front		Ø250-80	Ø250-80	Ø250-80	Ø250-80
	3.3	Tyre size, rear		Ø83-80	Ø83-80	Ø83-80	Ø83-80
	3.4	Additional wheels (dimensions)		Ø140-55	Ø140-55	Ø140-55	Ø140-55
	3.5	Wheels, number front/rear (- = driven wheels)		1x •1/4	1x •1/4	1x •1/4	1x •1/4
Performance data	3.6	Tread, front	b10 (mm)	516	516	516	516
	3.7	Tread, rear	b11 (mm)	385	385	385	385
	4.2	Height, mast lowered	h1 (mm)	1840	1890	1890	1990
	4.3	Free lift	h2 (mm)	90	90	90	90
Electric-engine	4.4	Lift	h3 (mm)	2700	2700	2700	2700
	4.5	Height, mast extended	h4 (mm)	3190	3240	3240	3340
	4.9	Height drawbar in driving position min./max.	h14 (mm)	1170/1400	1170/1400	1170/1400	1170/1400
	4.15	Height, lowered	h13 (mm)	90	90	90	90
Performance data	4.19	Overall length	l1 (mm)	1987 ²⁾	2019 ²⁾	2019 ²⁾	2019 ²⁾
	4.20	Length to face of forks	l2 (mm)	834 ³⁾	869 ³⁾	869 ³⁾	869 ³⁾
	4.21	Overall width	b1/b2 (mm)	800	800	800	800
	4.22	Fork dimensions DIN ISO 2331	s/e/l (mm)	60/185/1150	60/185/1150	60/185/1150	65/185/1150
Performance data	4.25	Fork spread	bs (mm)	570	570	570	570
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	25	25	25	25
	4.34.1	Aisle width for pallets 1000 • 1200 crossways	Ast (mm)	2201(2632) ¹⁾³⁾	2236(2667) ¹⁾³⁾	2236(2667) ¹⁾³⁾	2236(2667) ¹⁾³⁾
	4.34.2	Aisle width for pallets 800 • 1200 lengthways	Ast (mm)	2251(2682) ²⁾³⁾	2286(2717) ²⁾³⁾	2286(2717) ²⁾³⁾	2286(2717) ²⁾³⁾
Performance data	4.35	Turning radius	Ws (mm)	1551(1982)	1586(2017)	1586(2017)	1586(2017)
	5.1	Travel speed, laden/unladen	km/h	9/11	9/11	9/11	8/10
	5.2	Lift speed, laden/unladen	m/s	0.225/0.47	0.195/0.4	0.18/0.4	0.16/0.34
	5.3	Lowering speed, lade/unladen	m/s	0.45/0.4	0.45/0.4	0.45/0.4	0.5/0.4
Performance data	5.8	Max. gradeability, laden/unladen	%	10/16	10/16	8/16	8/16
	5.10	Service brake		Regenerative	Regenerative	Regenerative	Regenerative
Performance data	6.1	Drive motor rating S2 60 min	kW	2.2	2.2	2.2	2.2
	6.2	Lift motor rating at S3 15 %	kW	4.2	4.2	4.2	4.2
	6.4	Battery voltage /nominal capacity	V/Ah	48/80	48/80	48/80	48/80
	6.5	Battery weight	kg	60	60	60	60

Note: 1) According to VDI2198 standard•220mm. 2)According to VDI2198 standard•140mm. 3)Triplex full-free•21mm

